


G1/2" Series

Solenoid Operated Versions N34 Series with 32 / 37 / 40 mm Coil


Port size	Orifice	Q _N	Admissible differential pressure (bar)		Max. admissible fluid temperature (°C)		Seat disc	Reference number			Consumption Power (Watt)		Weight (g)	Elect. Group	Dim. Ref.
			max.												
G	mm	L/min	min	DC=	AC~	Air & Neutral gases		Valve	Housing	Coil	DC	AC			

3/2 Solenoid operated Combined spring & air return (monostable)




1/2	12	3000	2.5	10	10	50	NBR	331N34	2995	481865	9	8	910	2	10
1/2	12	3000	2.5	10	10	50	NBR	-	2995	495870	9	8	1130	2	-
1/2	12	3000	2.5	10	10	50	NBR	-	-	495905	8	8	1170	2	-

5/2 Solenoid operated Combined spring & air return (monostable)



1/2	12	3000	2.5	10	10	50	NBR	341N34	2995	481865	9	8	900	2	11
1/2	12	3000	2.5	10	10	50	NBR	-	2995	495870	9	8	1120	2	-
1/2	12	3000	2.5	10	10	50	NBR	-	-	495905	8	8	1160	2	-

5/2 Solenoid operated and return (bistable)




1/2	12	3000	2.5	10	10	50	NBR	347N34	2995	481865	9	8	1240	2	12
1/2	12	3000	2.5	10	10	50	NBR	-	2995	495870	9	8	1680	2	-
1/2	12	3000	2.5	10	10	50	NBR	-	-	495905	8	8	1760	2	-

Dimensions Reference 10

Dimensions Reference 11

Dimensions Reference 12

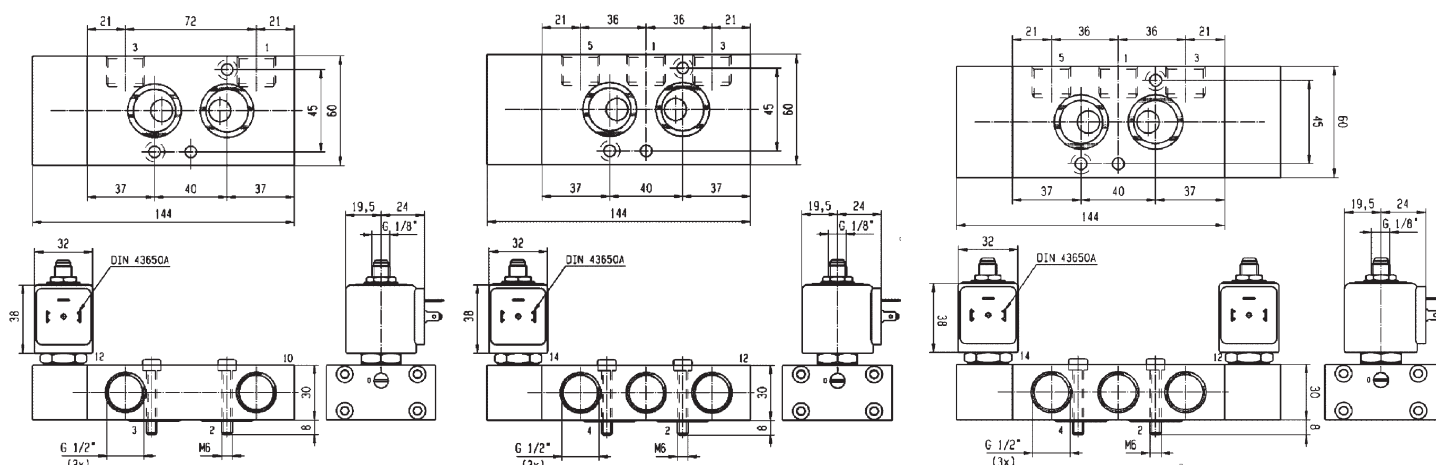

Please consult the "How to Order" part at the end of each coil chapter.