





ITT Enidine's **New ECO Series** non-adjustable hydraulic shock absorbers can accommodate varying energy conditions. This family of tamperproof shock absorbers provides consistent performance, cycle after cycle. Non-adjustable models are designed to absorb maximum energy within a compact envelope size.

The **New ECO Series** was designed using materials and fluids that are safe for our environment. Models can accommodate a wide range of operating conditions with varying masses or propelling forces. The **New ECO Series** offers a flexible design to accommodate a wide variety of application parameters. Whether your application has a low velocity/high drive force or high velocity/low drive force condition, the **New ECO Series** will deliver the performance that you have come to expect.

Features and Benefits

- **Extensive non-adjustable product line** offers flexibility in both size and energy absorption capacity to fulfill a wide range of application requirements.
- **Environmentally friendly materials:**
 - RoHS Compliant materials
 - Bio-degradable hydraulic oil
 - Recyclable packaging materials
- **Introducing our new Enicote II surface finish:**
 - RoHS Compliant
 - Rated at 350 hours salt spray corrosion protection
- **Jam Nut included** with every shock absorber.
- **ISO quality standards** result in reliable, long-life operation.
- **Tamperproof design** ensures repeatable performance.
- **Threaded cylinders provide mounting flexibility** and increase surface area for improved heat dissipation.
- **Wrench flats** promote ease of mounting
- **Capability to mount into pressure chambers**
- **Integrated positive stopping capabilities** up to 7 bar.
- **Special materials and finishes** can be designed to meet specific customer requirements
 - Optional fluids and seal packages can expand the standard operating temperature range from (-10°C to 80°C) to (-35°C to 100°C).
 - Food grade options available
- **Custom orificed (CBECO)** can be engineered to meet specific application requirements or emergency impact only requirements.

ITT Enidine Non-Adjustable Multiple Orifice Shock Absorbers

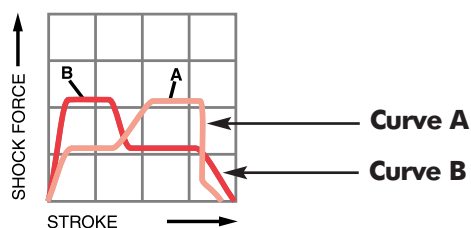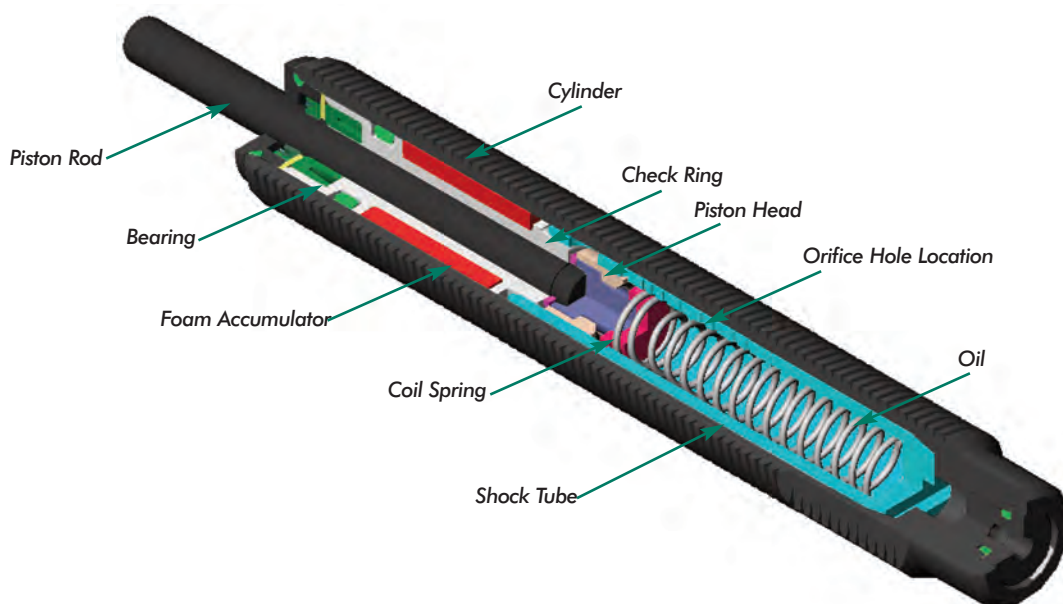

Self-compensating damping maintains acceptable deceleration with conventional type damping characteristics. Self-compensating shock absorbers operate over a wide range of weights and velocities. These shock absorbers are well suited for high drive force, low velocity applications, and where energy conditions may change. **Curve A** shows the *shock force vs. stroke* curve of a self-compensating shock absorber impacted with a low velocity and high drive force. **Curve B** shows the *shock force vs. stroke* curve of a self-compensating shock absorber impacted with a high velocity and low drive force.


The design of a multi-orifice shock absorber features a double cylinder arrangement with space between the concentric shock tube and cylinder, and a series of orifice holes drilled down the length of the shock tube wall.

During piston movement, the check ring is seated and oil is forced through the orifices in the shock tube wall, into the closed cellular foam accumulator and behind the piston head.

As the piston head moves it closes off orifice holes, thus reducing the available orifice area in proportion to the velocity. After the load is removed the coil spring pushes the piston rod outward. This unseats the check ring and permits the oil to flow from the accumulator and across the piston head, back into the shock tube. This allows quick repositioning for the next impact.

Low Pressure multiple orifice shock absorbers can provide progressive or self-compensating damping, depending on the impact conditions.

Standard

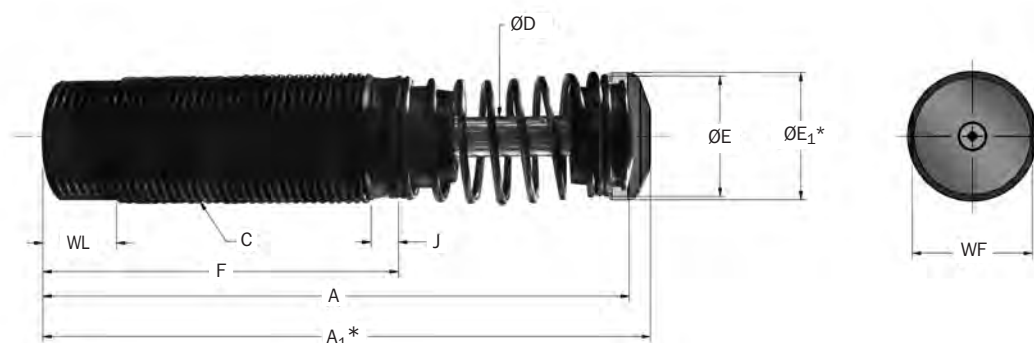

*Note: A₁ and E₁ apply to button models and urethane striker cap accessory.

Catalog No./Model	(S) Stroke mm	(E _T) Max. Nm/cycle	(E _T E) Emergency Max. Nm/cycle	(E _T C) Max. Nm/h	(F _p) Max. Reaction N	Nominal Coil Spring Force		(F _D) Max. Propelling N	Mass g
						Extended N	Compressed N		
**PRO 110 MF (B)	40,0	190,0	—	75 700	7 500	18,0	49,0	2 200	454
**PRO 110 MC (B)	40,0	190,0	—	75 700	7 500	18,0	49,0	2 200	454
ECO 120 MF (B)	25,0	185,0	500	84 000	11 120	56,0	89,0	3 100	482
ECO 125 MF (B)	25,0	185,0	500	104 000	11 120	56,0	89,0	3 100	595
ECO 220 MF (B)	50,0	350,0	1 000	103 000	11 120	31,0	89,0	3 100	652
ECO 225 MF (B)	50,0	350,0	1 000	127 000	11 120	31,0	89,0	3 100	765

*Note: Maximum energy rating for emergency use only. Estimated cycle life of 1-5 cycles if used at maximum emergency rating.

**The PRO 110 Model is a Nickel Plated Shock Absorber.

Catalog No./Model	Damping Constant	A mm	A ₁ mm	C mm	D mm	E mm	E ₁ mm	F mm	J mm	WF mm	WL mm
**PRO 110 MF (B)	-1,-2,-3	201,4	204,7	M25 x 1,5	8,0	22,2	22,2	127,0	1,5	—	—
**PRO 110 MC (B)	-1,-2,-3	201,4	204,7	M25 x 2,0	8,0	22,2	22,2	127,0	1,5	—	—
ECO 120MF (B)	-1,-2,-3	140,2	145,3	M33 x 1,5	9,5	29,0	30,5	87,0	5,3	30,0	16,0
ECO 125 MF (B)	-1,-2,-3	140,2	145,3	M36 x 1,5	9,5	29,0	30,5	87,0	5,3	33,0	16,0
ECO 220 MF (B)	-1,-2,-3	207,0	212,0	M33 x 1,5	9,5	29,0	30,5	128,0	5,3	30,0	16,0
ECO 225 MF (B)	-1,-2,-3	207,0	212,0	M36 x 1,5	9,5	29,0	30,5	128,0	5,3	33,0	16,0

Notes: 1. Dash numbers in page color are non-standard lead time items, contact ITT Enidine.


2. See page 55 for constant damping curves.

Non-Adjustable Series Hydraulic Shock Absorbers
ECO Series

Accessories

ECO 120 → ECO 225 Series


Clevis Mount

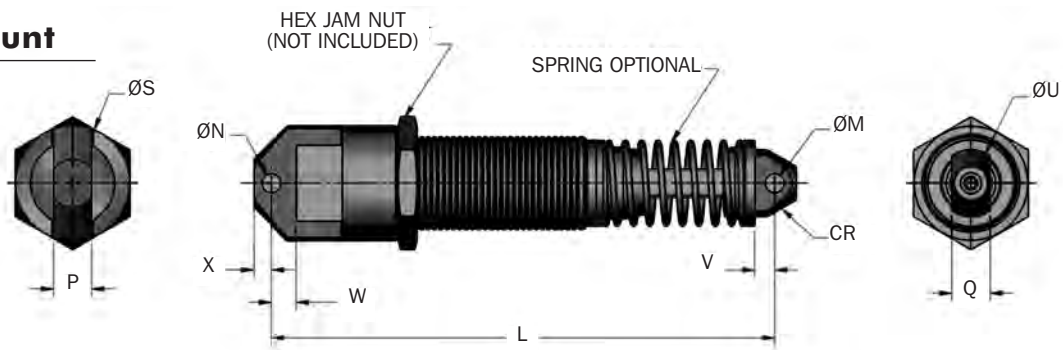

Catalog No./ Model	L mm	M +0.005/-0.000 mm	N +0.005/-0.000 mm	P +0.000/-0.010 mm	Q +0.000/-0.010 mm	S mm	U mm	V mm	W mm	X mm	CR mm	Mass Kg
ECO 120 CM (S)	167	6,38	6,38	12,70	12,70	38	23	6	12	6,1	11,2	0,59
ECO 220 CM (S)	234	6,38	6,38	12,70	12,70	38	23	6	12	6,1	11,2	0,77
ECO 125 CM (S)	180	6,38	6,38	12,70	12,70	38	22	6	24	6,0	11,2	0,73
ECO 225 CM (S)	230	6,38	6,38	12,70	12,70	38	22	6	24	6,0	11,2	0,86

Note: (S) indicates model comes with spring.


Flange Foot Mount

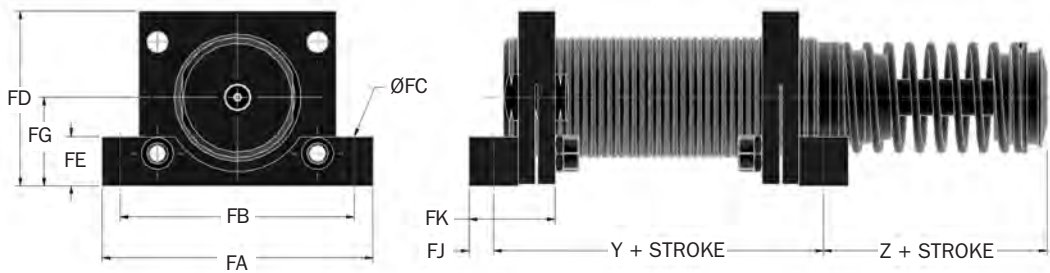

Catalog No./ Model	Part Number	Model (Ref)	Y mm	Z mm	FA mm	FB mm	FC mm	FD mm	FE mm	FG mm	FJ mm	FK mm	Bolt Size mm	Kit Mass g
FM M33 x 1,5	2F21049306	ECO 120/220M	57,2	31,8	70,0	60,3	5,90	45,0	12,7	22,7	6,4	22,2	M5	100
FM M36 x 1,5	2F21293306	ECO 125/225M	57,2	31,8	70,0	60,3	5,90	45,0	12,7	22,7	6,4	22,2	M5	100


Notes: 1. Shock absorber must be ordered separately from foot mount kit.
2. All foot mount kits include two foot mounts.

Stop Collar (SC)

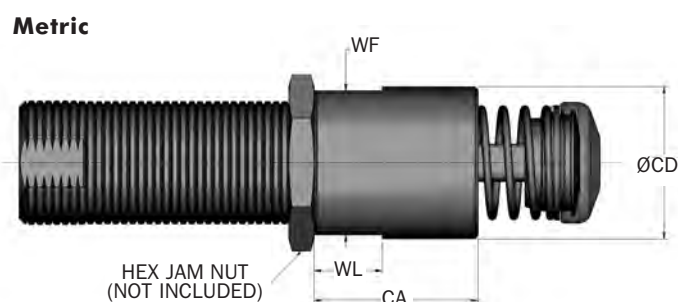

Catalog No./ Model	Part Number	Model (Ref)	CA mm	CD mm	WF mm	WL mm	Mass g
SC M33 x 1,5	M923865058	ECO 120/220 M	41,0	38,0	36,0	17,0	210
SC M36 x 1,5	M924063058	ECO 120/220 M	63,5	43,0	41,0	18,0	210

Jam Nut (JN)

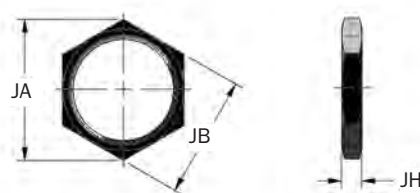


Catalog No./ Model	Part Number	Model (Ref)	JA mm	JB mm	JH mm	Mass g
JN M33 x 1,5	J224061035	ECO 120/220 M	47,3	41,0	6,4	27
JN M36 x 1,5	J224063035	ECO 125/225 M	47,3	41,0	6,4	27

Non-Adjustable Series Hydraulic Shock Absorbers
ECO Series

ECO 120 → ECO 225 Series


Overview

Urethane Striker Cap (USC)

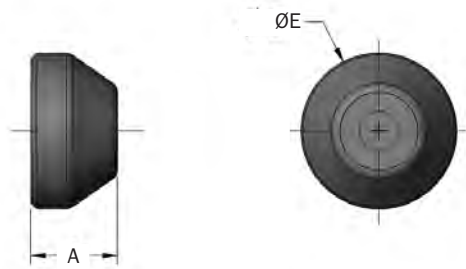







Catalog No./ Model	Part Number	Model (Ref)	A mm	E1 mm	Mass g
UC 8609	C98609079	ECO 120, 125, 220 & 225	10,0	30,5	3

Rectangular Flange (RF)

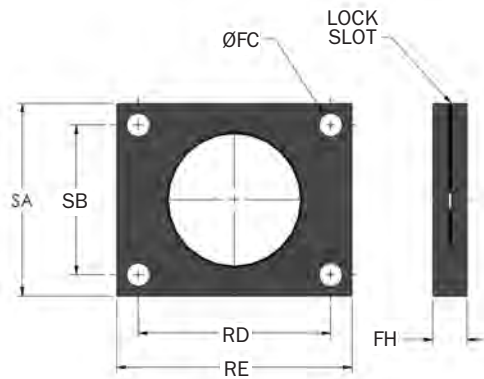

Catalog No./ Model	Part Number	Model (Ref)	FC mm	FH mm	RD mm	RE mm	SA mm	SB mm	Bolt Size mm	Mass g
RF M33 x 1,5	N121049141	ECO 120/ 220M	5,5	9,5	41,3	50,8	44,5	28,6	M5	30
RF M36 x 1,5	N121293129	ECO 125/225M	5,5	9,5	41,3	58,8	44,5	28,6	M5	30


ECO 50 → ECO 225 Series

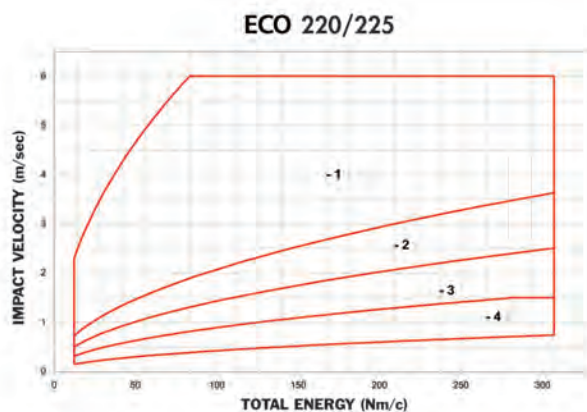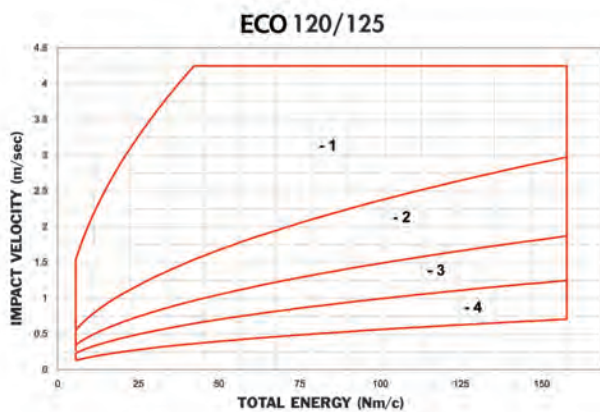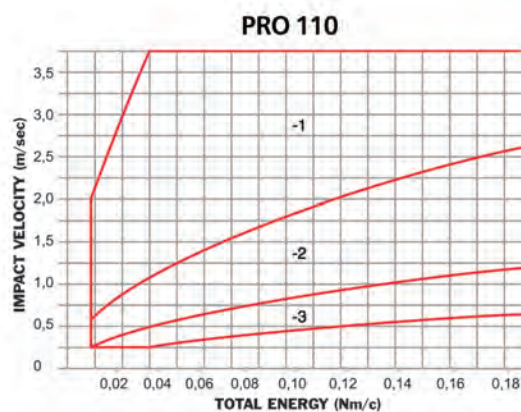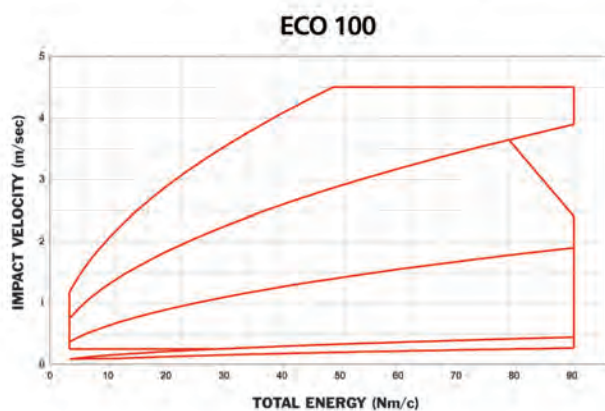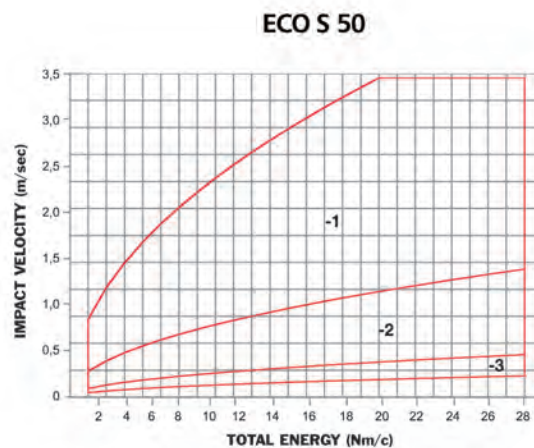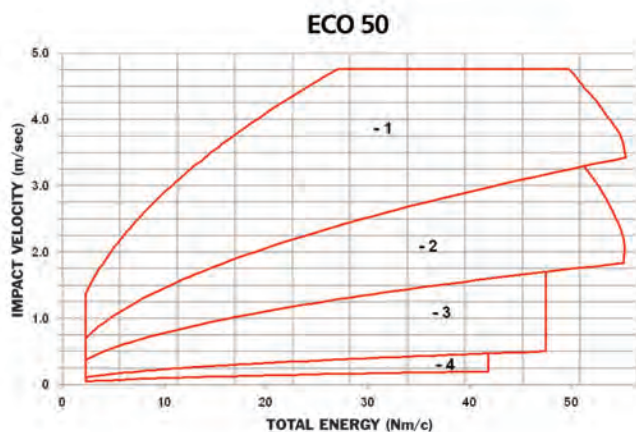

Note: Minimum impact velocity for ECO models is 0,1 m/sec



Factory Automation

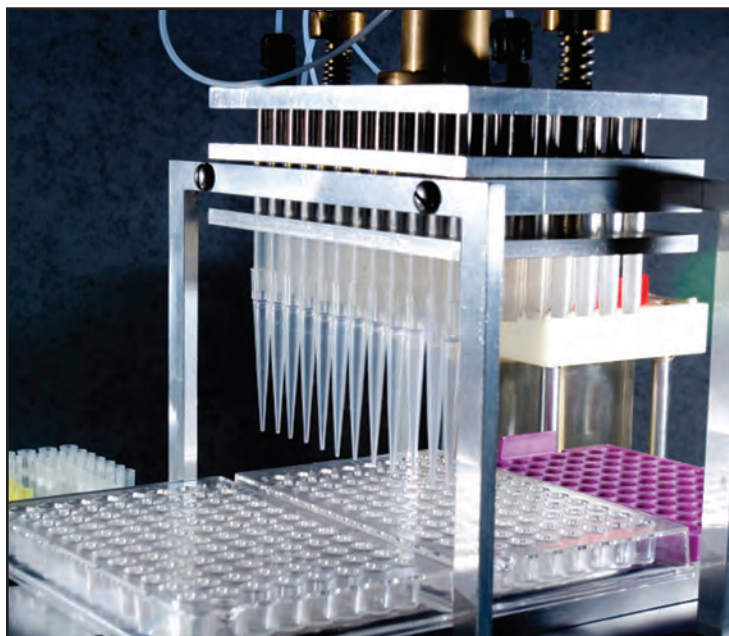

Medical Laboratory Equipment



Bottle Manufacturing