






WARNING — USER RESPONSIBILITY

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

- This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise.
- The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors.
- To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems.

Description	Page n°
Quick exhaust valves	4 - 5
Non Return Valves	6 - 7
Shuttle Valves	8
Back Pressure Sensors.....	9 - 10
Speed Flow Control Valves	11
Pressure Switches	12 - 13
Exhaust Silencers	14 - 16
Strainers	17 - 18


Sintered Bronze Series

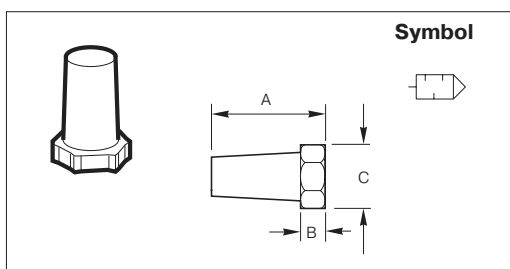

Port mm	A	Ø B	A/F C	Weight g	Order Code
G1/8	15	8	13	0,060	9721900404

Stainless Steel Mufflers Series

Corrosion resistant mufflers for harsh environments

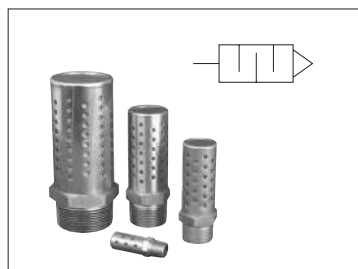


Port Size	Construction	Threads	Dimensions In. (mm)		Order Code
			Width	Lenght	
1/4	Stainless Steel	Male. NPT	0.56 (14.2)	1.75 (44.5)	5500A2004
1/2	Stainless Steel	Male. NPT	0.87 (22.1)	2.75 (69.7)	5500A4004
1	Stainless Steel	Male. NPT	1.31 (33.3)	3.87 (98.3)	5500A6004
2	Nickel plated	Male. NPT	2.37 (60.2)	5.50 (139.7)	5500A9004*

* Nickel plated

ES Series - Silencer

The silencer is designed to give superior performance in noise control with a minimum effect on air efficiency. "Trimline" design allows location in the tightest places without extra plumbing and fittings. Fits directly into the exhaust port of more than 90% of present commercial valves. Slotted body permits rapid discharge of air without undesirable back pressure. Unique nylon screen element resists dirt buildup or clogging.



Operating information

Operating pressure: 250 psig (Air) max.

Operating temperature:* 0°F to 300°F

* Ambient temperatures below freezing require moisture-free air. Ambient temperatures below freezing and above 180° require lubricants especially selected for suitability at these temperatures. Pneumatic valves should be used with filtered and lubricated air.

Pipe Thread	Flow scfm @ 100 psig inlet	Dimensions			Order Codes NPTF	BSPT (R)
		A	B	D		
1/8"	115	1.85	0.81	0.63	ES12MC	ESB12MC
1/4"	129	1.85	0.81	0.63	ES25MC	ESB25MC
3/8"	219	3.31	1.26	1.00	ES37MC	ESB37MC
1/2"	549	3.31	1.26	1.00	ES50MC	ESB50MC
3/4"	893	4.56	2.01	1.62	ES75MC	ESB75MC
1"	1,013	4.56	2.01	1.62	ES100MC	ESB100MC
1-1/4"	1,486	5.69	2.88	-	ES125MC	ESB125MC
1-1/2"	1,580	5.69	2.88	-	ES150MC	ESB150MC

Dimensions in mm