

Cylinder mountings

Type	Description	Cyl. bore Ø mm	Weight kg	Order code
------	-------------	-------------------	--------------	------------

Flange-MF8

Intended for fixed attachment of the cylinder. The flange is designed for mounting on the front or rear end-covers.

Material:
Surface-treated steel

10	0,012
12-16	0,025
20-25	0,045

P1A-4CMB
P1A-4DMB
P1A-4HMB

Stainless Flange-MF8

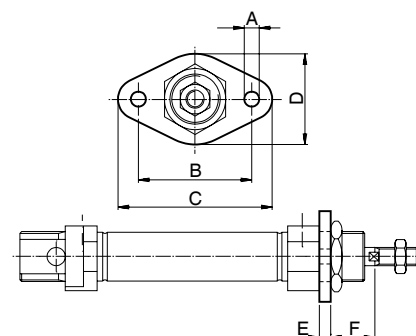
Intended for fixed attachment of the cylinder. The flange is designed for mounting on the front or rear end-covers.

Material:
Stainless steel, DIN X 10 CrNiS 18 9

10	0.012
12-16	0.025
20-25	0.045

P1S-4CMB
P1S-4DMB
P1S-4HMB

Cylinder Ø mm	A mm	B mm	C mm	D mm	E mm	F mm
10	4.5	30	40	22	3	13
12-16	5.5	40	52	30	4	18
20	6.5	50	66	40	5	19
25	6.5	50	66	40	5	23

**Foot-MS3**

Intended for fixed attachment of the cylinder. The bracket is designed for mounting on the front or rear end covers.

Material:
Surface-treated steel

10	0.020
12-16	0.040
20-25	0.080

P1A-4CMF
P1A-4DMF
P1A-4HMF

Stainless Foot-MS3

Intended for fixed attachment of the cylinder. The bracket is designed for mounting on the front or rear end covers.

Material:
Stainless steel, DIN X 10 CrNiS 18 9

10	0.020
12-16	0.040
20-25	0.080

P1S-4CMF
P1S-4DMF
P1S-4HMF

Cylinder Ø mm	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm
10	4.5	16	25	35	3	24	26.0	16	11
12-16	5.5	20	32	42	4	32	32.5	20	14
20	6.6	25	40	54	5	36	45.0	25	17
25	6.6	25	40	54	5	40	45.0	25	17

