


Adjustable Series Hydraulic Shock Absorbers

OEMXT Mid-Bore Series Accessories

OEMXT 1 1/8 → (LR)OEMXT 2.0M Series

Accessories


Clevis Mount

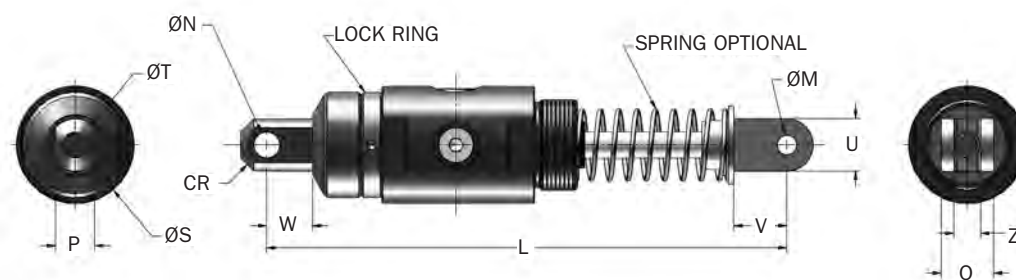

Catalog No./Model	(S) Stroke mm	L mm	M mm	N mm	P mm	Q mm	S mm	T mm	U mm	V mm	W mm	Z mm	CR mm	Mass Kg
Δ (LR)OEMXT 1 1/8 x 2 CM (S)	50	306,0	19,07 +0,25/0	19,07 +0,25/0	31,7 0/-0,3	38,0 +0,5/0,0	73,0	38,0	38,0	36,0	26,0	16,0	23,0	5,30
Δ (LR)OEMXT 2.0M x 2 CM (S)	50	306,0	19,07 +0,25/0	19,07 +0,25/0	31,7 0/-0,3	38,0 +0,5/0,0	73,0	38,0	38,0	36,0	26,0	16,0	23,0	5,30
Δ OEMXT 1 1/8 x 4 CM (S)	100	408,0	19,07 +0,25/0	19,07 +0,25/0	31,7 0/-0,3	38,0 +0,5/0,0	73,0	38,0	38,0	36,0	26,0	16,0	23,0	6,08
Δ OEMXT 2.0M x 4 CM (S)	100	408,0	19,07 +0,25/0	19,07 +0,25/0	31,7 0/-0,3	38,0 +0,5/0,0	73,0	38,0	38,0	36,0	26,0	16,0	23,0	6,08
Δ OEMXT 1 1/8 x 6 CM (S)	150	537,0	19,07 +0,25/0	19,07 +0,25/0	31,7 0/-0,3	38,0 +0,5/0,0	73,0	38,0	38,0	36,0	26,0	16,0	23,0	7,39
Δ OEMXT 2.0M x 6 CM (S)	150	537,0	19,07 +0,25/0	19,07 +0,25/0	31,7 0/-0,3	38,0 +0,5/0,0	73,0	38,0	38,0	36,0	26,0	16,0	23,0	7,39

Notes: 1. "S" designates model is supplied with spring.
2. Δ = Non-standard lead time items, contact ITT Enidine.

Flange Foot Mount

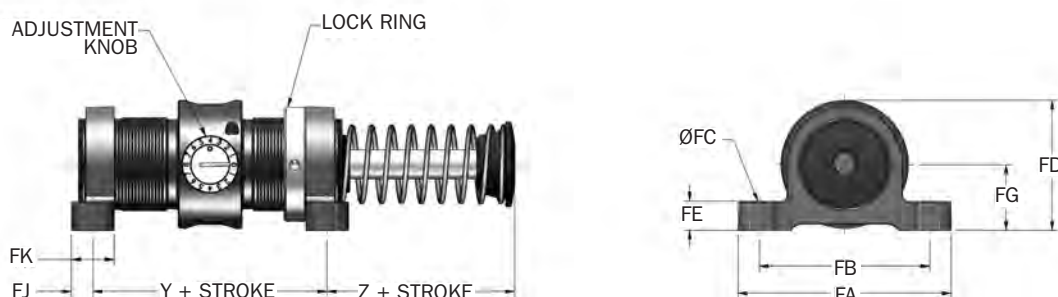

Catalog No./Model	Part Number	Model Ref	Y mm	Z mm	FA mm	FB mm	FC mm	FD mm	FE mm	FG mm	FJ mm	FK mm	Bolt Size mm	Mass Kg	Notes
FM 2 1/2 x 12	2FE3010	(LR)OEM 1 1/8	76,2	39,6	143,0	124,0	10,4	89,7	16,0	44,5	11,2	22,4	M10	1.08	1
FM M64 x 2	2F3010	(LR)OEM 2.0M	76,2	39,6	143,0	124,0	10,4	89,7	16,0	44,5	11,2	22,4	M10	1.08	2

Notes: 1. OEM 1 1/8 x 6 'Z' dimension is 68,3 mm.
2. OEM 2.0M x 6 'Z' dimension is 68,3 mm.


Non-Adjustable Series Hydraulic Shock Absorbers

PMXT Mid-Bore Series

PMXT 1525 CM → PMXT 2150 CM Series

Accessories

Clevis Mount

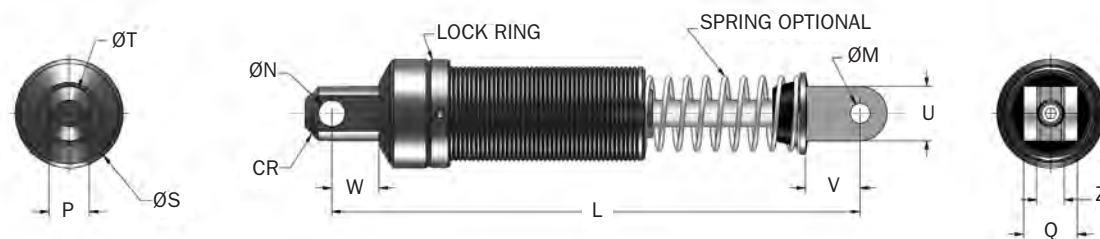


Catalog No./Model	L mm	M +0.005/-0.000 (+0,13/-0,00) mm	N +0.005/-0.000 (+0,13/-0,00) mm	P +0.000/-0.010 (+0,00/-0,25) mm	Q +0.000/-0.010 (+0,00/-0,25) mm	S mm	T mm	U mm	V mm	W mm	Z +0.020/-0.000 (+0,51/-0,00) mm	CR mm	Mass Kg
Δ PMXT 1525 CM (S)	199	9,60	12,7	19,00	25,4	51	25	25	26	22	12,9	14,3	1,36
Δ PMXT 1550 CM (S)	250	9,60	12,70	19,00	25,4	51	25	25	26	22	12,9	14,3	1,45
Δ PMXT 1575 CM (S)	300	9,60	12,70	19,00	25,4	51	25	25	26	22	12,9	14,3	1,63
Δ PMXT 2050 CM (S)	306	19,07	19,07	31,70	38,0	73	38	38	35	26	16,0	23,0	3,72
Δ PMXT 2100 CM (S)	408	19,07	19,07	31,70	38,0	73	38	38	35	26	16,0	23,0	4,22
Δ PMXT 2150 CM (S)	537	19,07	19,07	31,70	38,0	73	38	38	35	26	16,0	23,0	5,08

Notes: 1. Δ = Non-standard lead time items, contact ITT Enidine.

2. (S) indicates model comes with spring.

Flange Foot Mount

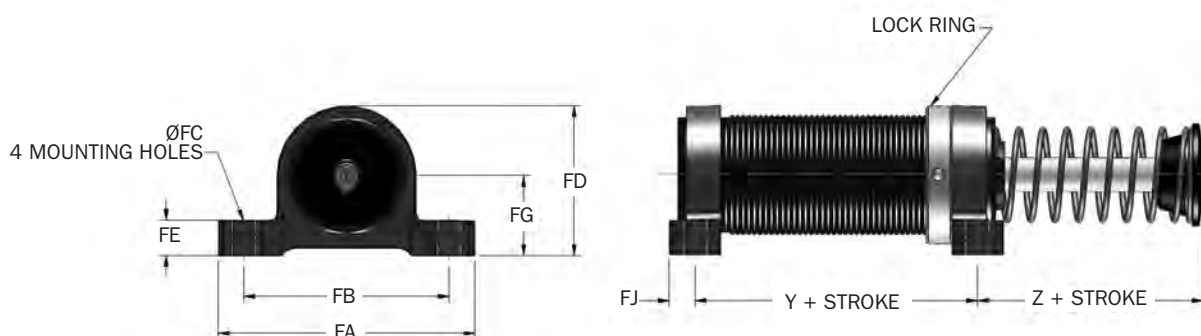

Catalog No./Model	Part Number	Model (Ref)	Y mm	Z mm	FA mm	FB mm	FC mm	FD mm	FE mm	FG mm	FJ mm	Size mm	Bolt Mass g	Kit Notes
FM M45 x 1,5	2F8637	PMXT 1500M Series	60,5	26,9	95,3	76,2	8,60	55,0	12,7	29,5	9,7	M8	370	3
FM M64 x 2	2F3010	PMXT 2000M Series	76,2	39,6	143,0	124,0	10,40	85,6	16,0	44,5	11,2	M10	1 050	1,3

Notes: 1. PM 2150 Z dimension is 2.69 in.

2. Shock absorber must be ordered separately from foot mount kit.

3. All foot mount kits include two foot mounts and lock ring.