


Coils 32 mm / 37 mm / 40 mm for N33-N34-N35 Series ATEX Zone 2-22

Ref. 495870


This coil with connection 2P+G - when mounted together with the supplied Pg 9 plug (delivered with the coil), is suitable for use in Gas and Dust dangerous areas (**Zone 2-22**), according to the European directive **ATEX 94/9/C**.

Certificate LCIE 05 ATEX 6003 X - Protection mode: non sparking / limited energy solenoid

- II 3 G - Ex nAC IIC T3 / T4
- II 3 D - Ex tD A22 IP65 - T 195°C / T 130°C



- Power: 8W (AC) 9W (DC)
- Insulation Class: F (155°C)
- Degree of Protection: IP65 (with plug)
- Duty Cycle: 100% ED
- Voltage Tolerance -10%/+10%
- Ambient temperature
 - ▶ T3 (gaz) T 195°C (dust) -40°C/+65°C
 - ▶ T4 (gaz) T 130°C (dust) -40°C/+50°C
 - ▶ The application can be limited also by the temperature range of the valve

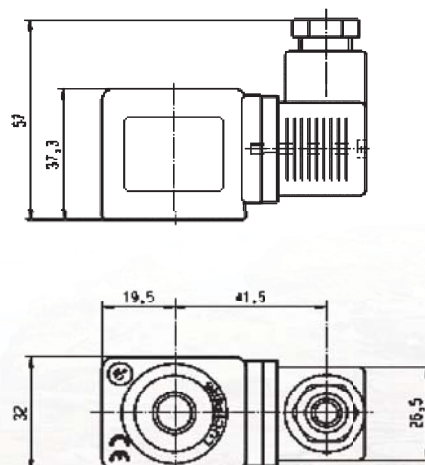

Available Voltages	Order Code
24VDC	495870 C2
48VDC	495870 C4
110VDC	495870 C5
24/50VAC	495870 A2
48/50VAC	495870 A4
110/50VAC	495870 A5
220-230/50VAC	495870 3D



How to Order

This coil must be used together with a housing kit which includes a nut, a plate, and a washer. Housing kit order code: **2995**

Valve Reference Number - Coil Reference - Voltage code = Order code

Example: 331N34 - 2995 - 495870 A5

Valves and coils may be ordered also separately.