
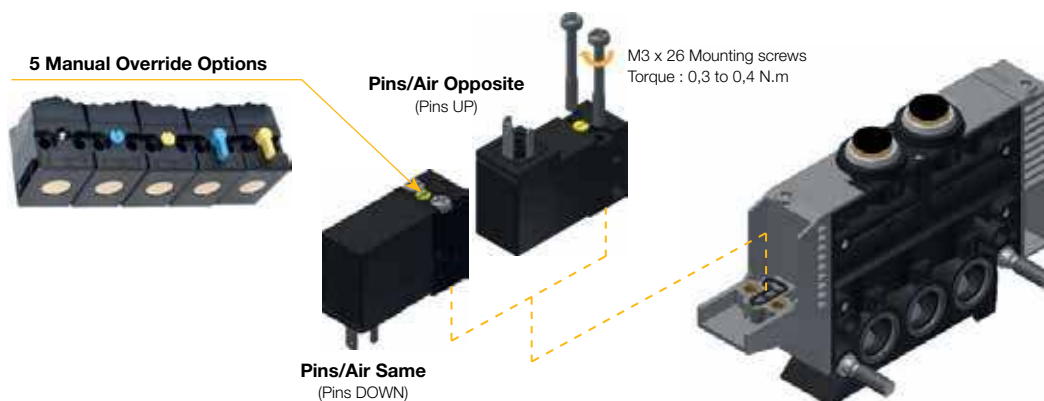












PVL-B2 – 15 mm pilot solenoid valve options



15mm DIN Form C (8mm spacing) pilot solenoid valve

For use with 15mm pilot solenoid valve PVL-B2 body

	Voltage	W (g)	Manual Overrides		Flush (Not Extended)		Extended	
			Without Manual Override	Order code	Blue Override, non locking	Yellow Override, Locking	Blue Override, non locking	Yellow Override, Locking
 Pins/Air Opposite (Pins UP) 	12 Vdc	38		P2E-KV32B0	P2E-KV32B1	P2E-KV32B2	P2E-KV32B3	P2E-KV32B4
	24 Vdc	38		P2E-KV32C0	P2E-KV32C1	P2E-KV32C2	P2E-KV32C3	P2E-KV32C4
	48 Vdc	38		P2E-KV32D0	P2E-KV32D1	P2E-KV32D2	P2E-KV32D3	P2E-KV32D4
	24 Vac 50Hz	38		P2E-KV31C0	P2E-KV31C1	P2E-KV31C2	P2E-KV31C3	P2E-KV31C4
	48 Vac 50/60Hz	38		P2E-KV34D0	P2E-KV34D1	P2E-KV34D2	P2E-KV34D3	P2E-KV34D4
	115 Vac 50Hz	38		P2E-KV31F0	P2E-KV31F1	P2E-KV31F2	P2E-KV31F3	P2E-KV31F4
	120 Vac 60 Hz	38		P2E-KV31J0	P2E-KV31J1	P2E-KV31J2	P2E-KV31J3	P2E-KV31J4
 Pins/Air Same (Pins DOWN) 	12 Vdc	38		P2E-KS32B0	P2E-KS32B1	P2E-KS32B2	P2E-KS32B3	P2E-KS32B4
	24 Vdc	38		P2E-KS32C0	P2E-KS32C1	P2E-KS32C2	P2E-KS32C3	P2E-KS32C4
	48 Vdc	38		P2E-KS32D0	P2E-KS32D1	P2E-KS32D2	P2E-KS32D3	P2E-KS32D4
	24 Vac 50Hz	38		P2E-KS31C0	P2E-KS31C1	P2E-KS31C2	P2E-KS31C3	P2E-KS31C4
	48 Vac 50/60Hz	38		P2E-KS34D0	P2E-KS34D1	P2E-KS34D2	P2E-KS34D3	P2E-KS34D4
	115 Vac 50Hz	38		P2E-KS31F0	P2E-KS31F1	P2E-KS31F2	P2E-KS31F3	P2E-KS31F4
	120 Vac 60 Hz	38		P2E-KS31J0	P2E-KS31J1	P2E-KS31J2	P2E-KS31J3	P2E-KS31J4

Mounting screws included with the valve body

Pilot solenoid valve mounting screw

	Description	Size	Material	W (g)	Order code
	Kit of 10 mounting screws	M23 x 26	Steel	20	P2E-KP026PM3

Cable plugs 15 mm - IP65

(8 mm pin spacing)

	Description	Electrical protection	Cable length	W (g)	Order code
	Standard screw	No protection	No cable	11	P8C-D
			2 meter	97	P8L-C2
			5 meter	228	P8L-C5
	Standard screw	LED + Protection 24 VDC	No cable	11	P8C-D26C
		LED + Protection 24 VDC/AC	2 meter	97	P8L-C226C
			5 meter	229	P8L-C526C

Suppressor and LED indicators

For 8 mm solenoid pin spacing - For mounting between the solenoid valve and the cable plug

	Symbol	Description	Electrical Voltage	W (g)	Order code
		LED indicator	24 VAC/DC	3	P8V-CR26C
			115 VAC 50 Hz - 120 VAC 60 Hz	3	P8V-CR24F
			230 VAC 50 Hz - 240 VAC 60 Hz	3	P8V-CR24J