



aerospace
climate control
electromechanical
filtration
fluid & gas handling
hydraulics
pneumatics
process control
sealing & shielding



Miniature Solenoid Valves

Precision Fluidics



ENGINEERING YOUR SUCCESS.

Table of Contents

	product	page
	X-Valve® Miniature 8 mm Pneumatic Solenoid Valve Designed for Portable and Stationary Applications Requiring a Small Footprint and Low Power Consumption	1
	Series LX Miniature 8 mm Latching Pneumatic Solenoid Valve Designed for Respiratory and Patient Therapy Applications Requiring a High Flow in a Small Footprint	8
	Series MX Miniature 10 mm Pneumatic Solenoid Valve Designed for Portable and Stationary Applications Requiring Highest Flow to Power Consumption Ratio Increasing Device Battery Life	15
	C7 Miniature 7 mm Cartridge Pneumatic Solenoid Valve	25
	C15 Miniature 15 mm Cartridge Pneumatic Solenoid Valve	36
	C21 Miniature 21 mm Cartridge Pneumatic Solenoid Valve	47
	Series 11 Miniature 15 mm Pneumatic Solenoid Valve Designed for Portable and Stationary Applications requiring Compact Integration and Long Life with Numerous Material and Pneumatic Connectivity Options	58
	Series 25 Miniature 15 mm Pneumatic Solenoid Valve Designed for Portable and Stationary Applications requiring Long Life and Male Threaded Pneumatic Connectivity	66
	Series 26 Miniature 15 mm Pneumatic Solenoid Valve Designed for Portable and Stationary Applications requiring Long Life, Compact Integration, and Female Threaded Pneumatic Connectivity	73
	V² Miniature 15 mm Pneumatic Solenoid Valve Economical Valve Designed for Portable and Stationary Applications requiring Long Life and Minimal Weight	80
	SRS Miniature 10 mm Pneumatic Solenoid Valve Designed for Applications Requiring Low Power Consumption with Limited Manifold Space	86
	PND Series Miniature 10 mm Pneumatic Solenoid Valve Designed for Applications Requiring Rapid Pressure Relief and Fail Safe Operation	92
	Pulse Valve Miniature High Speed High Vacuum Dispense Valve Available With a Variety of Orifices, Seals, and Voltages to Match Your Application	96
	Value Added Application-Specific Solutions	103

Pulse Valves

Ultra Low Leak Extreme Performance Valve



Applications

- Gas pulse generation for Laser Spectroscopy

Pulse Valves solenoid valves offer outstanding potential for precision control of Laser Spectroscopy Gas Analysis. Combining high speed, ultra low leak rate, high flow, and high temperature capability in a small size; this rugged valve operates with extreme repeatability and is constructed of non-corroding, passivated stainless steel. Pulse Valves coils are rated for continuous duty and are potted to exclude the environment.

Features

- Smallest footprint in its class
- High speed response times of less than 2 ms
- 100% tested to leak-tight 1×10^{-7} cc/sec/atm Helium
- 100% duty cycle in environmental temperatures of up to 221°F (105°C)
- Pressures up to 1250 PSI (86.2 bar)
- Available with a variety of orifices, seals, and voltages to match your application
- RoHS compliant



Product Specifications

Physical Properties

Valve Type:
Inert Non Isolation
Valve Configuration:
2-Way Normally Closed
Media:
Gases
Operating Environment:
40 to 221°F (4 to 105°C)
Dimensions:
See Dimensions Page
Weight:
2.8 oz (79.4 g)
Porting:
A-LOK®, Flange
Internal Volume:
(Contact factory for details)

Electrical

Voltage (VDC):	20	28
Power (Watts):	12.1	11.2
Current (mA):	606	400
Resistance (Ohm):	33	70
(Ω±5% @ 70°F, 21°C)		
Connection		
12" Lead Wires Standard		

Wetted Materials

Poppet Materials*:	
Vespel®**	
PTFE	
O-Ring:	
FFKM (Kalrez®**)	
**NOTE: Vespel and Kalrez are trademarks of Dupont.	
* See accessories table under ordering information for additional poppet materials.	



Performance Characteristics

Operating Pressures / Orifice Diameters:
1x10 ⁻⁵ Torr -1250 psi (86.2 bar)/
0.004" (.10 mm)
0.020" (.51 mm)
0.031" (.79 mm)
1x10 ⁻⁵ Torr -750 psi (51.7 bar)/
0.039" (.99 mm)
Proof Pressure:
1.5X rated pressure
Response Time:
<2 ms cycling
Down to 160μs with the Parker IOTA ONE Valve Driver. (See Accessories)
Leak Rate:
1 x 10 ⁻⁷ cc/sec/atm Helium
Recommended Filtration:
40 μm max
Orifice Shape:
Cone, No Cone
(Cone improves exit stream uniformity)

Pulse Valves Ultra Low Leak Extreme Performance Valve

Mechanical Integration
Dimensions

1/4" [6.35 mm] A-LOK® CROSS-SECTION

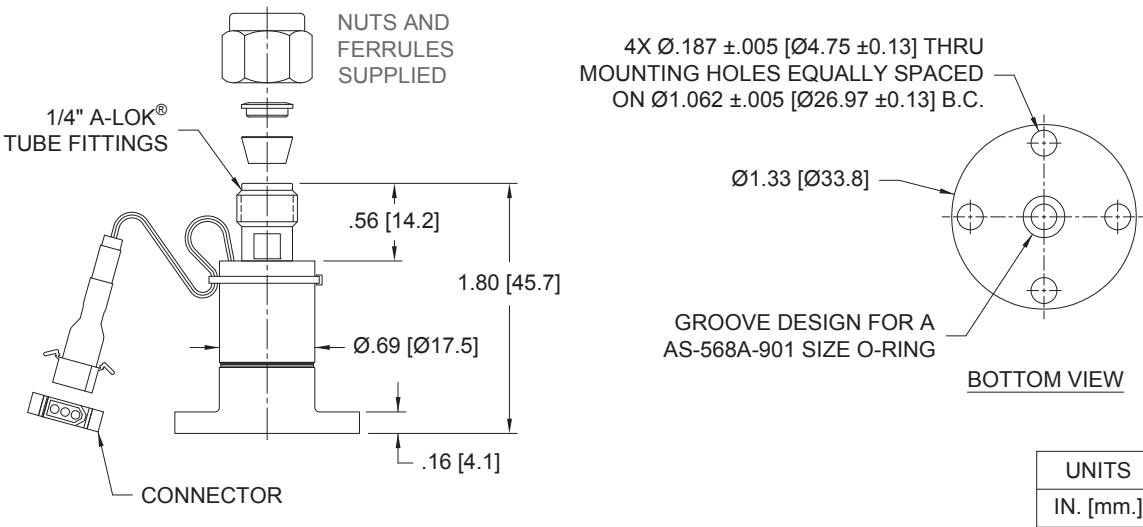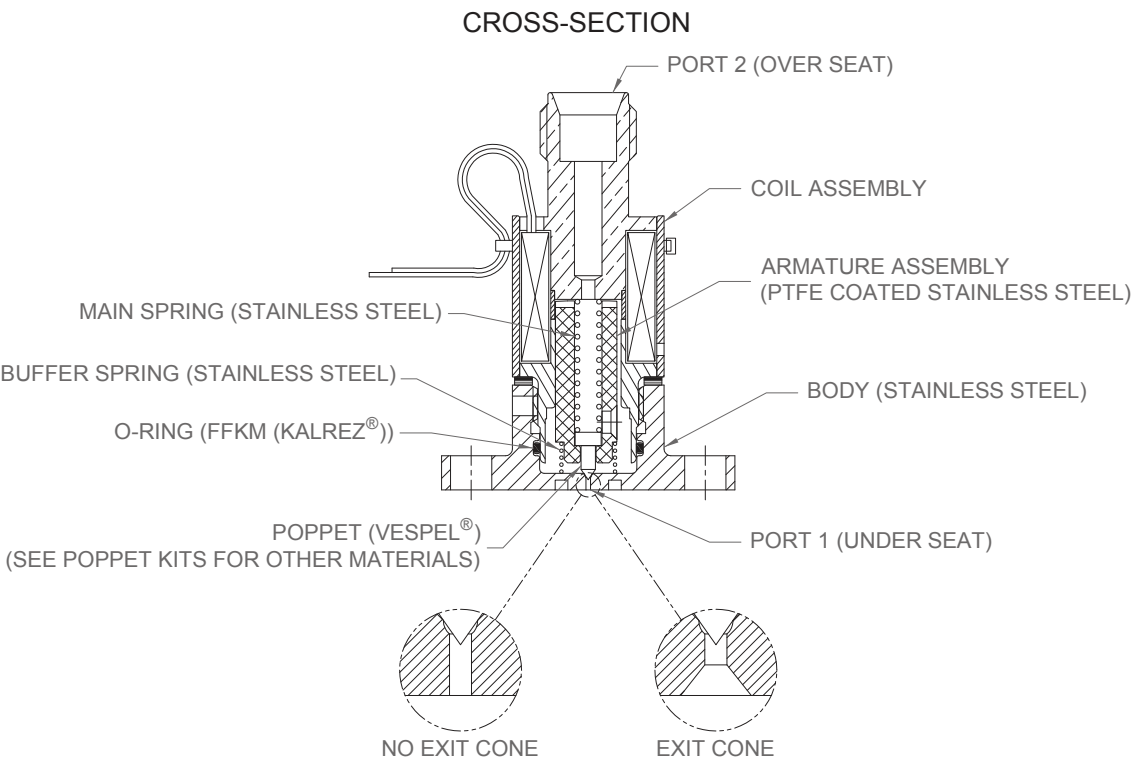


Pulse Valves Ultra Low Leak Extreme Performance Valve

Hit and Hold Specifications (12-Watt coils):

Hit and Hold is a method for driving valves that can be used to reduce power consumption and heat generation while maintaining valve performance specifications. The valve is “hit” with the full rated voltage for some time period to open it (T1 in the graph) and then “held” open with substantially reduced voltage until the desired pulse length is reached (T2 in the graph). The following table shows the possible holding voltages and power consumption for most of our standard 12-watt valve solenoids.

Rated Voltage (volts)	3-way		2-way	
	Hold Voltage	Hold Power	Hold Voltage	Hold Power
28	14 volts	2.8 watts	6 volts	0.51 watts
24	12 volts	3 watts	5 volts	0.52 watts
20	10 volts	3 watts	5 volts	0.76 watts
12	6 volts	3 watts	5 volts	2.1 watts

Note: Values for 7-watt coils may be different

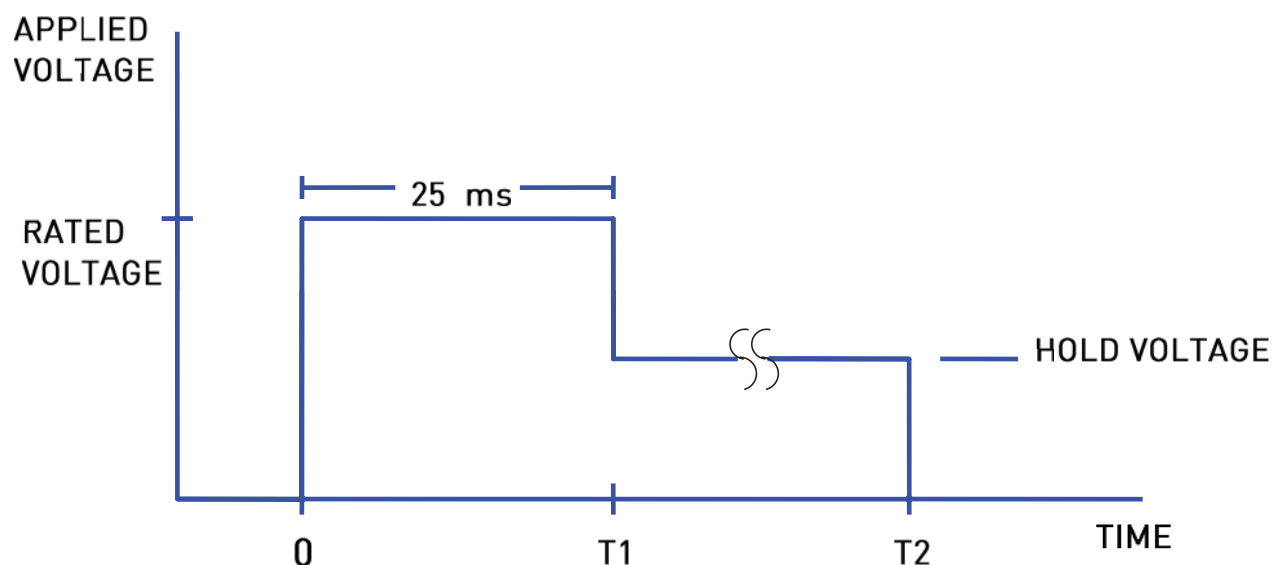

Hold Voltage Graph

Ultra Low Leak Extreme Performance Valve

Pulse Valves

Chemical Compatibility Chart

Chemical	FFKM	PTFE	Stainless Steel	Vespel
DI Water	1	1	1	2
Methanol	1	1	1	1
Isopropanol	1	1	1	1
Ethanol	1	1	1	1
Acetonitrile	1	1	1	1
Tetrahydrofuran	1	1	1	2
Toluene	1	1	1	1
Organic Acids - Dilute	1	1	1	1
Non Organic Acids - Dilute	1	1	1	1
Bases - Dilute	1	1	1	1
Saline	1	1	1	1
Bleach 12%	1	1	2	4
Sodium Hydroxide 20%	1	1	1	4

COMPATIBILITY LEGEND		
1	EXCELLENT	Minimal or no effect
2	GOOD	Possible swelling and/or loss of physical properties
3	DOUBTFUL	Moderate or severe swelling and loss of physical properties
4	NOT RECOMMENDED	Severe effect and should not be considered

Pulse Valves Ultra Low Leak Extreme Performance Valve Accessories

IOTA ONE
060-0001-900
(Microfluidic Valve Driver)



Ordering Information

Orifice Size	Pressure	Valve Type	Seal Material	Voltage	Inlet Porting	Outlet Porting	Part Number
0.004" (.10 mm)	Vac-1250 psi (86.2 bar)	2-Way NC	PTFE, FFKM	28V	1/4" A-Lok®	Flange, No Cone	009-1668-900
			Vespel, FFKM	20V			009-1670-900

Orifice Size	Pressure	Valve Type	Seal Material	Voltage	Inlet Porting	Outlet Porting	Part Number
0.020" (.51 mm)	Vac-1250 psi (86.2 bar)	2-Way NC	PTFE, FFKM	28V	1/4" A-Lok®	Flange, No Cone	009-0582-900
			Vespel, FFKM	20V	1/4" A-Lok®	Flange, Exit Cone	009-0442-900
						Flange, No Cone	009-1421-900
						Flange, Exit Cone	009-0347-900

Orifice Size	Pressure	Valve Type	Seal Material	Voltage	Inlet Porting	Outlet Porting	Part Number
0.031" (.79 mm)	Vac-1250 psi (86.2 bar)	2-Way NC	PTFE, FFKM	28V	1/4" A-Lok®	Flange, No Cone	009-0381-900
			Vespel, FFKM	20V	1/4" A-Lok®	Flange, Exit Cone	009-0181-900
						Flange, No Cone	009-1671-900
						Flange, Exit Cone	009-0279-900

Orifice Size	Pressure	Valve Type	Seal Material	Voltage	Inlet Porting	Outlet Porting	Part Number
0.039" (.99 mm)	Vac-750 psi (51.7 bar)	2-Way NC	PTFE, FFKM	28V	1/4" A-Lok®	Flange, No Cone	009-1669-900
			Vespel, FFKM	20V			009-1643-900

Pulse Valve Rebuild Kits

Pulse Valve Rebuild Kits	Part Number
With Teflon Poppets	009-PTFE-KIT
With Vespel® Poppets	009-VSPL-KIT
With Kel-F® Poppets	009-KELF-KIT
With PEEK Poppets	009-PEEK-KIT
Kit Contents	Quantity Per Kit
Poppet	10
Buffer Spring	5
Load Spring	5
Internal Viton® O - Ring	5
External Viton® O - Ring	5
Teflon Coated Armature	1
Shims (Various Thicknesses)	40

Pulse Valve Poppet Kits	Part Number
PTFE Poppets Qty. 50pcs	003-0023-050-KIT
Kel-F® Poppets Qty. 50pcs	009-0185-020-KIT
Vespel® Poppets Qty. 10pcs	009-0595-020-KIT
PEEK Poppets Qty. 50pcs	009-0424-030-KIT
Pulse Valve Coils	Part Number
12 VDC	009-0280-050-2
20 VDC	009-0279-050-2
28 VDC	009-0181-050-2
Pulse Valve Bodies (Flange with conical discharge)	Part Number
0.020" (0.5 mm) Orifice	009-0309-010-003
0.031" (0.8 mm) Orifice	009-0181-010-003

NOTE: In order to provide the best possible solution for your application, please provide the following requirements when contacting Applications Engineering:

- Media, Inlet & Outlet Pressures
- Minimum Required Flow Rate
- System Supply Voltage
- Media
- Ambient Temperature Range

Please click on the Order On-line button (or go to www.parker.com/precisionfluidics/pulse) to configure your Pulse Valve Ultra Low Leak Extreme Performance Valve. For more detailed information, visit us on the Web, or call 603-595-1500.



For more information call +1 603 595 1500 or email ppfinfo@parker.com
Visit www.parker.com/precisionfluidics



Pulse Valves Ultra Low Leak Extreme Performance Valve
Series 9 Accessory Kits

SERIES 9 Accessory Kits			
Teflon Pulse Valve Kit - Contents			Qty
Teflon Poppet			10
Buffer Spring			5
Load Spring			5
Internal Viton Oring			5
External Viton Oring			5
Teflon Coated Armature			1
Shims (Various Thicknesses)			40
Part Number	009-PTFE-KIT		1
VespeI Pulse Valve Kit - Contents			Qty
VespeI Poppet			5
Buffer Spring			5
Load Spring			5
Internal Viton Oring			5
External Viton Oring			5
Teflon Coated Armature			1
Shims (Various Thicknesses)			40
Part Number	009-VSPL-KIT		1
Kel-f Pulse Valve Kit - Contents			Qty
Kel-f Poppet			10
Buffer Spring			5
Load Spring			5
Internal Viton Oring			5
External Viton Oring			5
Teflon Coated Armature			1
Shims (Various Thicknesses)			40
Part Number	009-KELF-KIT		1
PEEK Pulse Valve Kit - Contents			Qty
PEEK Poppet			10
Buffer Spring			5
Load Spring			5
Internal Viton Oring			5
External Viton Oring			5
Teflon Coated Armature			1
Shims (Various Thicknesses)			40
Part Number	009-PEEK-KIT		1
SERIES 9 POPPET KITS			Qty
Part Number	003-0023-050-KIT	PTFE Poppets	50
Part Number	009-0185-020-KIT	Kel-F Poppets	50
Part Number	009-0595-020-KIT	VespeI Poppets	10
Part Number	009-0424-030-KIT	PEEK Poppets	50
SERIES 9 ORINGS (Kalrez)			Qty
Part Number	009-0070-100-001	Internal Kalrez Oring	1
Part Number	001-0045-020-001	External Kalrez Oring	1
SERIES 9 COIL (1/4" A-LOK FITTING)***			Qty
Part Number	009-0280-050-2	12 VDC	1
Part Number	009-0181-050-2	28 VDC	1
Part Number	009-0279-050-2	20 VDC	1
SERIES 9 BODIES (Flange with conical discharge)			Qty
Part Number	009-0309-010-003	.020" (0.5 mm)	1
Part Number	009-0181-010-003	.031" (0.8 mm)	1
Part Number	091-0351-010-003	.004" (0.1 mm)	1

Please contact customer service for order placement, leadtime and price
***Series 9 coils shown do not ship with electrical connectors



Pulse Valves Ultra Low Leak Extreme Performance Valve

FAQs

1. Can the IOTA One trigger both 20 and 28V pulse valves?

Yes, the IOTA One can trigger 12, 20, 24, and 28V pulse valves. However, you will need to change the jumper settings in the unit, reference manual that ships with the unit. Please note current standard coil are 20 and 28V.

2. I used to purchase a pulse valve which is not listed in the chart above, is this pulse valve still available?

Currently, only the pulse valve configurations listed in the chart above are available for purchase.

3. I used to purchase spare parts for my pulse valve, are they still available?

Yes, spare parts are still available for pulse valves. Please note that only the kits and part numbers above are available for purchase. Poppets, armatures, springs, etc... are no longer available for individual purchase and will need to be purchased as part of a kit.

4. Can the IOTA One trigger multiple valves at once?

Currently, the IOTA One is designed to trigger only one valve at a time.

5. What is the fastest pulse duration, opening response time and closing response time?

Typically, the fastest achievable pulse duration is 300 microseconds, opening response time is 180-200 microseconds, and closing response time is 50-250 microseconds.

6. Which Poppet material should I choose and why?

Poppet material should first be chosen based on compatibility with the gas you are flowing through the valve. If multiple materials are compatible then for general and low temperature and pressure applications PTFE and Kel-F should be used, for higher temperature and pressure applications Vespel or PEEK should be used.

7. Is there a performance advantage between the different voltage valves?

The performance difference between voltages is negligible. However, please note that the 20V coil is capable of handling 125C temperatures.

8. What is the maximum cycle frequency for the valve?

The maximum cycle frequency for the valve is 250Hz.


Value Added Application-Specific Solutions

Gassing Control System



- Mixed gassing logic design includes VSO® proportional valves, X-Valve®, pressure switch, pressure sensors, and PCB interface

7 Position X-Valve® Pneumatic Manifold



- Integrated pressure/vacuum sensors
- Mixed pneumatic logic design
- Ultem® manifold pressure/vacuum sensors

Vacuum Gas Control Module




- Tested to 1×10^{-7} cc/sec/atm Helium
- Assembly tested on mass spectrometer

6 Position VSO® Proportional Valve Pneumatic Manifold Assembly



- Quick connect fittings
- Circuit board with mass electrical termination

5 Position SRS Model Pneumatic Manifold



- Mixed pneumatic logic assembly
- Integrated pressure sensors
- Mass termination of sensors & valves
- Pressed in barbed fittings

8 Position SRS Model Pneumatic Manifold



- Integrated circuit board mounting
- Mass electrical termination

10 Position X-Valve® Pneumatic Manifold



- Mixed pneumatic logic design
- Ultra-miniature design with PCB for mass termination

10 Position SRS Model Pneumatic Manifold



- Circuit board with transducers
- Pressed in barbed fittings

For more information call +1 603 595 1500 or email ppfinfo@parker.com
Visit www.parker.com/precisionfluidics