
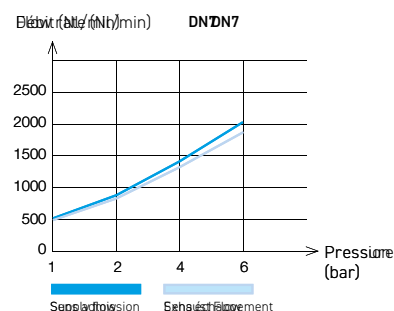


Installation guide

Maximum tightening torque (daN.m)	Thread		
	G1/8	G1/4	G3/8
	0.8	1.2	3

User guide

Flow characteristics - pressure drop

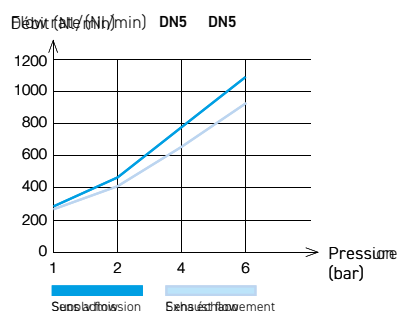

7926

Body with Push-In Connection

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



DN	ØD	References
5	6	7926 05 06
5	8	7926 05 08
7.3	10	7926 07 10

7960

Straight Probe, Push-In Connection

Technical polymer, NBR



Scan for more dimensions



DN	ØD	References
5	6	7960 05 06
5	8	7960 05 08
7.3	10	7960 07 10

7921

Body with Male BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
5	G1/8	7921 05 10
5	G1/4	7921 05 13
7.3	G3/8	7921 07 17