


Operating principle

Switch operated fittings




Open

Closed

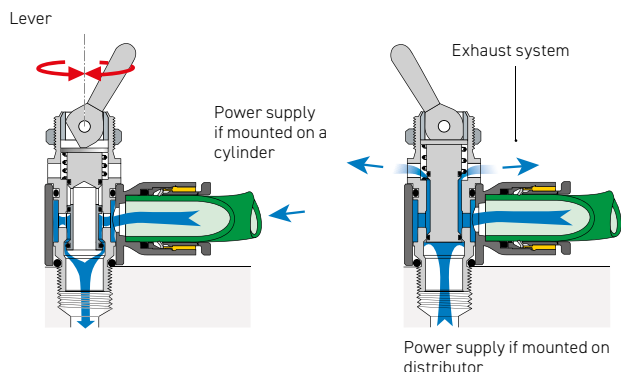


Sleeve valves



Open: downstream supply

Closed: downstream supply

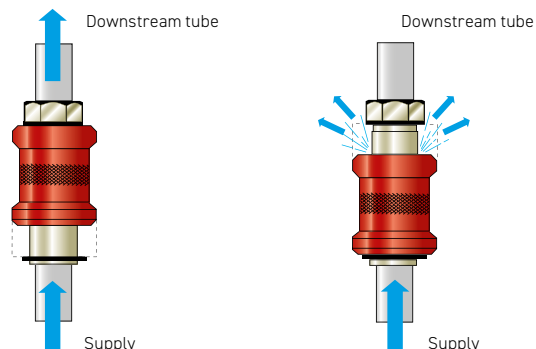

7800

3/2 Manual Switch-Operated Valve, Supply, Male BSPP and Metric Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	M5x0.8	7800 04 19
	G1/8	7800 04 10
6	M5x0.8	7800 06 19
	G1/8	7800 06 10
8	G1/4	7800 06 13
	G1/8	7800 08 10
8	G1/4	7800 08 13

For part numbers 7800 04 19 and 7800 06 19, the seal under the base is provided by a PTFE flat gasket, and the assembly tightening torque is 0.16 daN·m maximum.

7801

3/2 Manual Switch-Operated Valve, Control, Male BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	G1/8	7801 04 10
6	G1/8	7801 06 10
	G1/4	7801 06 13
8	G1/8	7801 08 10

7802

2/2 Manual Switch-Operated Valve, Male BSPP Thread

Technical polymer, Nickel-plated brass, NBR



Scan for more dimensions



ØD	C	References
4	G1/8	7802 04 10
6	G1/8	7802 06 10
	G1/4	7802 06 13
8	G1/8	7802 08 10
	G1/4	7802 08 13

0669

3/2 Sleeve Valve, Female BSPP and Metric Thread

Nickel-plated brass, NBR



Scan for more dimensions



DN	C	References
2.5	M5x0.8	0669 02 19
4	G1/8	0669 04 10
7	G1/4	0669 07 13
10	G3/8	0669 10 17
14	G1/2	0669 14 21
19	G3/4	0669 19 27