

Blowgun Kits



Ergonomic, the blowgun kit remains an essential item of equipment for blowing or spraying operation in industrial environment.

Technical Characteristics

- **Compatible Fluids:** Compressed air
Other fluids: contact us
- **Working Pressure:** 0 to 10 bar
- **Working Temperature:** Air: -15°C to +50°C
Dry air: -20°C to +80°C
- **Tubes:** Recoil tubing

Regulations


- **PED**
- **RoHS**
- **REACH**
- **OSHA**
- **DI: 2003/10/CE**

Regulation relating to exposure to noise, particularly with regard to risks to hearing. The noise level must be less than 87 dBA

Design protection:

All designs and models of Parker Legris blowguns have been registered with the following numbers: 13 224/13 225/13 226

Component Materials

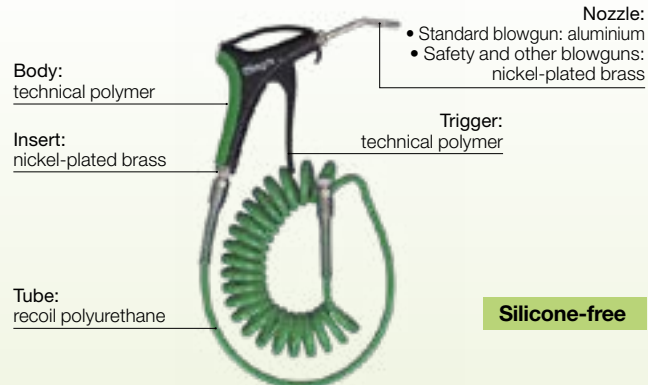


Silicone-free

Advantages

- **Kit contents:**
 - one blowgun
 - a 4 metre recoil tube
 - one R1/4 threaded fitting, external diameter 8 mm
- **Safety**
- **Optimisation of your energy consumption**
- **Minimum pressure drop**

0631..09 Blowgun Kit, Lower Connection, Male BSPT Thread

Technical polymer, Nickel-plated brass, treated aluminium, NBR




C	F	H	H1	L	Kg
R1/4 0631 00 09	16	192.5	139.5	152	0.441

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0659 00 13).

0631..23 Energy Saving Blowgun Kit with Angled Nozzle, Male BSPT Thread

Technical polymer, Nickel-plated brass, NBR




C	F	H	H1	L	Kg
R1/4 0631 00 23	16	195	148.5	163	0.456

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0653 66 13).
External diameter of tube 6 mm

0631..01 Safety Blowgun Kit, Lower Connection, Male BSPT Thread

Technical polymer, Nickel-plated brass, NBR




C	F	H	H1	L	Kg
R1/4 0631 00 01	16	198.5	148.5	154	0.575

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0654 00 13).

0631..05 Blowgun Kit Lower Connection with Short Angled Nozzle, Male BSPT Thread

Technical polymer, Nickel-plated brass, NBR



C	F	H	H1	L	Kg
R1/4 0631 00 05	16	195.5	148.5	163	0.536

Flow characteristics, noise level and norm compliance are identical to those of our blowguns (0656 66 13).