


## 6300 LIQUIfit® Cartridge

Inch

Brass, EPDM




| ØD  |                   | G    | G1   | H    | L    | Kg    |
|-----|-------------------|------|------|------|------|-------|
| 1/4 | <b>6300 56 00</b> | 10.5 | 14.5 | 12.5 | 600  | 0.002 |
| 3/8 | <b>6300 60 00</b> | 15.5 | 19   | 17   | 930  | 0.005 |
| 1/2 | <b>6300 62 00</b> | 22   | 25   | 23   | 1038 | 0.011 |

50 cartridges per Carstick®


5/32" (4 mm) and 5/16" (8 mm) also available.

Please consult us for detailed drawings of cavity dimensions and tolerances

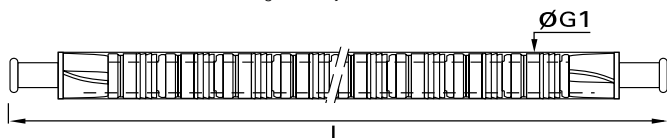

## 6579 Fixed Elbow, Male BSPT Thread

Bio-based polymer, EPDM




| ØD | C    |                      | G  | H  | J  | L  | Kg    |
|----|------|----------------------|----|----|----|----|-------|
|    | R1/8 | <b>6579 06 10WP2</b> | 11 | 14 | 10 | 19 | 0.002 |
| 6  | R1/4 | <b>6579 06 13WP2</b> | 11 | 14 | 10 | 19 | 0.003 |
|    | R3/8 | <b>6579 06 17WP2</b> | 11 | 14 | 10 | 19 | 0.004 |

Thread without pre-coating.

## 6579 Fixed Elbow, Male NPTF Thread

Inch

Bio-based polymer, EPDM




| ØD  | C      |                      | G  | H  | J  | L  | Kg    |
|-----|--------|----------------------|----|----|----|----|-------|
| 1/4 | NPT1/8 | <b>6579 56 11WP2</b> | 11 | 22 | 38 | 18 | 0.009 |
|     | NPT1/4 | <b>6579 56 14WP2</b> | 11 | 26 | 38 | 18 | 0.003 |
| 3/8 | NPT1/4 | <b>6579 60 14WP2</b> | 16 | 32 | 12 | 26 | 0.006 |

Thread without pre-coating.

## 6579 Fixed Elbow, Male BSPT Thread

Inch

Bio-based polymer, EPDM



| ØD  | C    |                      | G  | H  | J  | L  | Kg    |
|-----|------|----------------------|----|----|----|----|-------|
| 1/4 | R1/4 | <b>6579 56 13WP2</b> | 11 | 26 | 10 | 18 | 0.003 |
| 3/8 | R3/8 | <b>6579 60 17WP2</b> | 16 | 32 | 13 | 26 | 0.006 |

Thread without pre-coating.

## 6599 Stud Elbow, Male BSPP Thread

POM, EPDM



| ØD | C    |                      | E    | F  | G    | H    | Kg    |
|----|------|----------------------|------|----|------|------|-------|
| 6  | G1/8 | <b>6599 06 10WP2</b> | 6    | 17 | 15   | 24.5 | 0.007 |
|    | G1/4 | <b>6599 06 13WP2</b> | 8.5  | 18 | 15   | 33   | 0.008 |
|    | G1/8 | <b>6599 08 10WP2</b> | 6    | 18 | 17.5 | 26   | 0.010 |
| 8  | G1/4 | <b>6599 08 13WP2</b> | 8.5  | 18 | 17.5 | 26   | 0.011 |
|    | G3/8 | <b>6599 08 17WP2</b> | 9    | 22 | 17.5 | 26   | 0.012 |
|    | G1/4 | <b>6599 10 13WP2</b> | 8.5  | 22 | 20   | 29.5 | 0.015 |
| 10 | G3/8 | <b>6599 10 17WP2</b> | 9    | 22 | 20   | 29.5 | 0.015 |
|    | G1/2 | <b>6599 10 21WP2</b> | 12.5 | 26 | 20   | 29.5 | 0.019 |
|    | G3/8 | <b>6599 12 17WP2</b> | 9    | 26 | 23   | 34.5 | 0.023 |
| 12 | G1/2 | <b>6599 12 21WP2</b> | 12.5 | 26 | 23   | 34.5 | 0.025 |


Collet technology

Thread without pre-coating; the body swivels for positioning purposes.

NSF certified fitting only

## 6509 Stud Elbow, Male BSPT Thread

Bio-based polymer, EPDM




| ØD | C    |                      | F  | G    | H  | L    | Kg    |
|----|------|----------------------|----|------|----|------|-------|
|    | R1/8 | <b>6509 06 10WP2</b> | 13 | 10.5 | 28 | 24   | 0.037 |
| 6  | R1/4 | <b>6509 06 13WP2</b> | 14 | 10.5 | 28 | 24   | 0.007 |
|    | R3/8 | <b>6509 06 17WP2</b> | 17 | 10.5 | 28 | 24   | 0.008 |
|    | R1/8 | <b>6509 08 10WP2</b> | 19 | 13.5 | 34 | 29.5 | 0.010 |
| 8  | R1/4 | <b>6509 08 13WP2</b> | 19 | 13.5 | 34 | 29.5 | 0.011 |
|    | R3/8 | <b>6509 08 17WP2</b> | 19 | 13.5 | 34 | 29.5 | 0.011 |
|    | R1/4 | <b>6509 10 13WP2</b> | 19 | 16   | 38 | 34.5 | 0.019 |
| 10 | R3/8 | <b>6509 10 17WP2</b> | 19 | 16   | 38 | 34.5 | 0.020 |
|    | R1/2 | <b>6509 10 21WP2</b> | 22 | 16   | 38 | 34.5 | 0.023 |
|    | R3/8 | <b>6509 12 17WP2</b> | 22 | 19   | 44 | 40   | 0.022 |
| 12 | R1/2 | <b>6509 12 21WP2</b> | 22 | 19   | 44 | 40   | 0.024 |

Thread without pre-coating; the body swivels for positioning purposes.

## 6509 Stud Elbow, Male NPTF Thread

Inch

Bio-based polymer, EPDM



| ØD  | C      |                      | F    | G  | H    | L    | Kg    |
|-----|--------|----------------------|------|----|------|------|-------|
|     | NPT1/8 | <b>6509 56 11WP2</b> | 1/2  | 11 | 28   | 23.5 | 0.003 |
| 1/4 | NPT1/4 | <b>6509 56 14WP2</b> | 9/16 | 11 | 28   | 23.5 | 0.004 |
|     | NPT3/8 | <b>6509 56 18WP2</b> | 3/4  | 11 | 28.5 | 23.5 | 0.006 |

Thread without pre-coating, the body swivels for positioning purposes.