



Plug Valves Series PV

MATERIALS OF CONSTRUCTION	
FITTING:	BRASS
NUT:	BRASS
FERRULE:	BRASS

NOMENCLATURE	
EXAMPLE: PV607-2-OPTIONS	ATTRIBUTE:
PV	PLUG VALVE
607	MALE TO MALE
2	1/8" MALE
N (NOT SHOWN)	NEOPRENE (BROWN)
V (NOT SHOWN)	FLUOROCARBON (RED)

SPECIFICATIONS	
PRESSURE RANGE	UP TO 250 PSI
TEMPERATURE RANGE	-40° TO +175°F



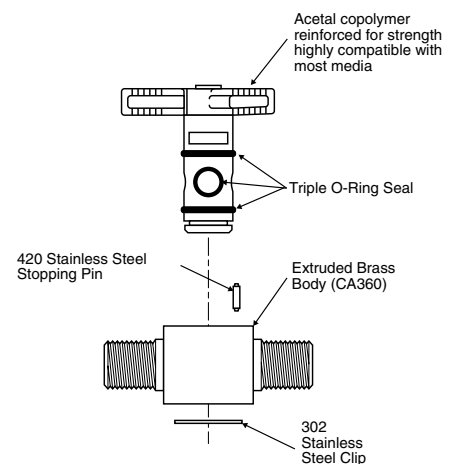
Hiliquia que nonestia serrum sunte laut eum aut fugit qui audam, sunt lant re anis etum cus ma qui ab ipsaped molorum nus, unt omnim aceped ut quo invol eum distius, iliquiberum eos eos sum in nosa illessu menist latisin velessint magnitaspid uta net rehent onsequo con exereni doluptatur aliquam, odis rereptatem quis simolor sum dus

K

Installation Instructions

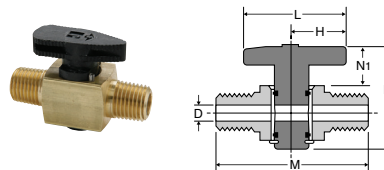
To assure sealability and reliable performance, the valve must be installed so that the flow media travels in the direction of the arrow on the valve handle.

Valve Components

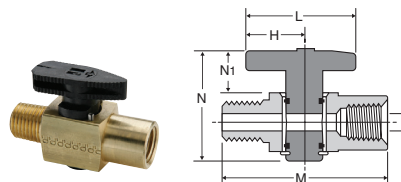


Male Pipe to Male Pipe Plug Valve PV607

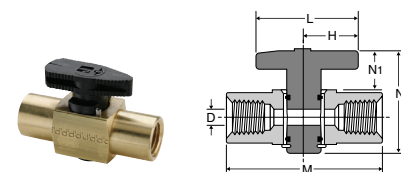
PART NO.	PIPE THREAD	H	L	M	N	N1	FLOW DIA. D
PV607-2	1/8	.67	1.34	1.66	1.38	.51	.200
PV607-4	1/4	.67	1.34	2.02	1.38	.51	.200

**Female Pipe to Male Pipe Plug Valve PV608**

PART NO.	PIPE THREAD	H	L	M	N	N1	FLOW DIA. D
PV608-2	1/8	.67	1.34	1.67	1.38	.51	.200
PV608-4	1/4	.67	1.34	2.06	1.38	.51	.200

**Female Pipe to Female Pipe Plug Valve PV609**

PART NO.	PIPE THREAD	H	L	M	N	N1	FLOW DIA. D
PV609-2	1/8	.67	1.34	1.68	1.38	.51	.200
PV609-4	1/4	.67	1.34	2.10	1.38	.51	.200

**Mounting Bracket PVMB-001**

PART NO.	H	L	M	N	N1	D
PVMB-001	.68	.75	1.86	.90	.45	.135

Note: 1" diameter hole required in panel when using mounting bracket

