

Mountings and brackets


For products series	Oder code	Weight [g]
Tie rods, VRS/VRA	P8S-TMA0X	65
Tie rods, P1F-T Ø 32-100	P8S-TMA07	10
Tie rods, P1F-T Ø 125-320	P8S-TMA08	32
T-Slot OSP Ø 10	8872FIL	3
T-Slot P Series Ø 16	8865FIL	4
T-Slot P Series Ø 25-80	8866FIL	5
Round cylinder Ø10-25	P8S-TMC01	27
Round cylinder Ø 32-63	P8S-TMC02	29
Round cylinder Ø 80-125	P8S-TMC03	32
S-Dovetail OSP, pack of 10	P8S-TMA09	10

Ambient temperature -30 to +80 °C

All mountings can be moved on the cylinder body before screwing in place and then putting sensors in the slots.

Dimensions in mm (inch)


P8S-TMC01, 02 & 03

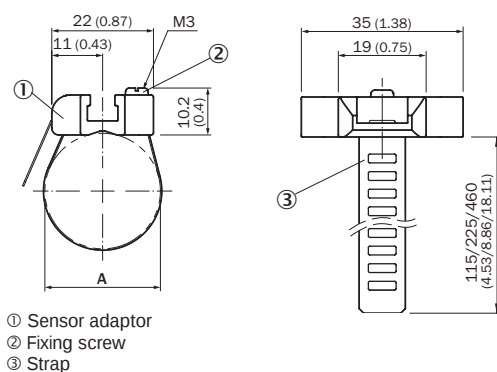

Oder code	A [mm]	
P8S-TMC01	8 to 25	Clamping ring in nickel silver, screw in stainless steel, sensor mounting zinc diecast
P8S-TMC02	32 to 63	
P8S-TMC03	80 to 130	


P8S-TMA0X

(Zinc diecast, zinc plated screws.)

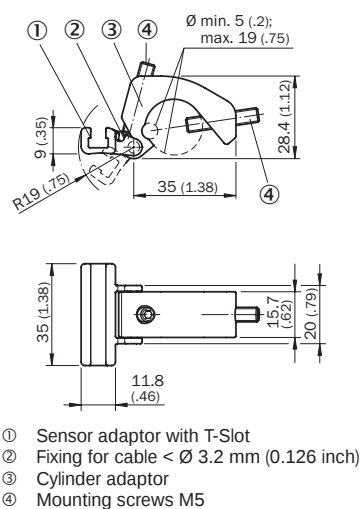

P8S-TMA07

(anodised aluminium, zinc plated screws)
Tie-Rods Cylinders Ø 32 to 100 mm

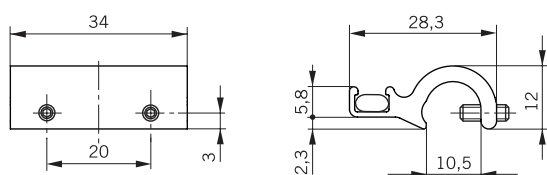

P8S-TMA08

(anodised aluminium, zingued screws)
Tie-Rods Cylinders Ø 125 to 320 mm

