



Rectangular Flange (RF)

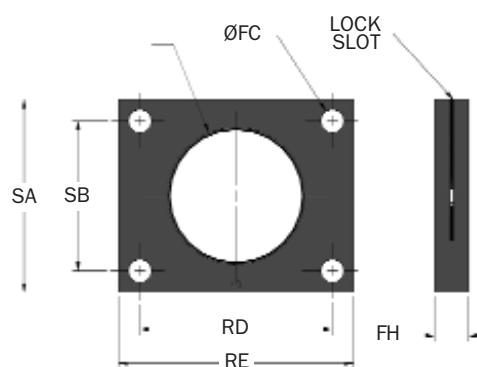

Catalog No./Model	Part Number	Model Ref	FC mm	FH mm	RD mm	RE mm	SA mm	SB mm	Bolt Size mm	Mass g
RF 1 3/4 -12	M5E2940129	(LR)OEMXT 3/4	8,6	12,7	60,5	76,2	57,2	41,4	M8	260
RF M42 x 1.5	M52940129	(LR)OEMXT 1.5M	8,6	12,7	60,5	76,2	57,2	41,4	M8	260
RF M85 x 2	M53330129	OEM 3.0M	13,5	19,1	101,6	127,0	101,6	76,2	M13	1 040


Urethane Striker Cap (UC)

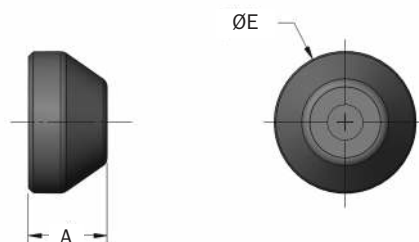

Catalog No./Model	Part Number	Model Ref	A mm	E ₁ mm	Mass g
UC 2940	C92940079	(LR)OEMXT 3/4	24,5	44,5	14
UC 3010	C93010079	(LR)OEMXT 1 1/8	24,1	57,0	23
UC 2940	C92940079	(LR)OEMXT 1.5M	24,5	44,5	14
UC 3010	C93010079	(LR)OEMXT 2.0M	24,1	57,0	23
UC 3330	C93330079	OEM 3.0M	31,4	76,0	85
UC 3720	C93720079	OEM 4.0M	37,5	95,0	170

Note: For complete shock absorber dimension with urethane striker cap, refer to engineering data, pages 27-31.

Stop Collar With Flange (SCF)

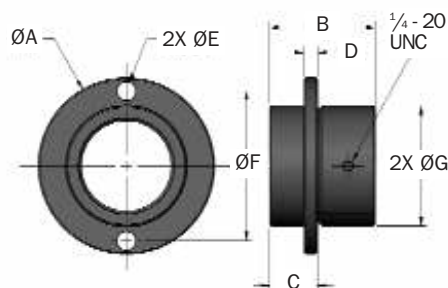

Catalog No./Model	Part Number	Model Ref	A mm	B mm	C _{±0.002} mm	D mm	E mm	F mm	G mm	Bolt Size mm	Mass g
Δ SCF 1 3/4 -12	M98640300	OEMXT 3/4	83	49,3	22,4	6,4	8,6	70	56	8	638


Notes: 1. Locking set screw feature provided as standard.
2. Δ = Non-standard lead time items, contact ITT Enidine.

PMXT 1525M → PMXT 2150M Series


Stop Collar (SC)

Catalog No./Model	Part Number	Model Ref	CA mm	CD mm	Mass g
SC M45 x 1.5	8K8637	PMXT 1500M Series	49,0	56,5	340
Δ SC M64 x 2 x 2	M93010057	PMXT 2050M Series	89,0	76,0	936
Δ SC M64 x 2 x 4	M93011057	PMXT 2100M Series	114,0	76,0	1 191
Δ SC M64 x 2 x 6	M93012057	PMXT 2150M Series	143,0	76,0	1 475

Note: Δ = Non-standard lead time items, contact ITT Enidine.

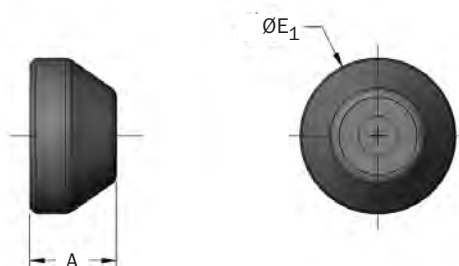Urethane Striker Cap (USC)

Catalog No./Model	Part Number	Model Ref	A mm	E ₁ mm	Mass g
UC 2940	C92940079	PMXT 1500M	24,5	44,5	14
UC 3010	C93010079	PMXT 2000M	24,0	57,0	23

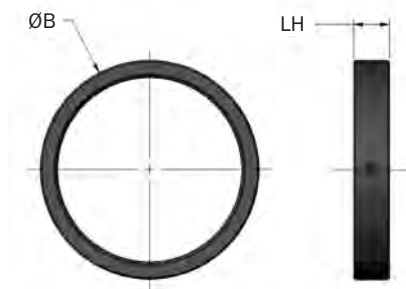Lock Ring (LR)

Catalog No./Model	Part Number	Model Ref	B mm	LH mm	Mass g
LR M45 x 1.5	F88637049	PMXT 1500M Series	57,2	9,5	75
LR M64 x 2	F83010049	PMXT 2000M Series	72,9	12,7	85