



SUBBASES & MANIFOLDS

ISO 5599-1

VDMA Side Ported Subbases

	Description	Size	Port Size	Weight (g)	Order code
	Subbases VDMA Side port according to VDMA	1 - 43mm	G1/4	160	P2N-VS512SD
		2 - 56mm	G3/8	280	P2N-WS513SD
		3 - 71mm	G1/2	350	P2N-YS514SD

VDMA Bottom Ported Manifold

	Description	Size	Port Size	Weight (g)	Order code
	VDMA Form C Bottom port according to VDMA	1 - 43mm	G1/4	240	P2N-VM512MB
		2 - 56mm	G3/8	360	P2N-WM513MB
		3 - 71mm	G1/2	700	P2N-YM514MB
	VDMA Transition plate Size 1 to Size 3 Kit includes: Transition plate only	1 to 3	G1/4		P2N-VM500AK
	VDMA Form D - End plate According to VDMA	1 - 43mm	G3/8	210	P2N-VM513ES
		2 - 56mm	G1/2	360	P2N-WM514ES
		3 - 71mm	G1	680	P2N-YM518ES
	VDMA Isolation - Main galley According to VDMA Kit includes: (1) Isolator plug.	1 - 43mm			P2N-VK0P
		2 - 56mm			P2N-WK0P
		3 - 71mm			P2N-YK0P


Accessories

	Description	Size	Port Size	Weight (g)	Order code
	Blanking plate Kit includes: (1) Blanking plate, (1) Gasket and (4) Mounting bolts	1 - 43mm	G1/4	100	P2N-AA5B
		2 - 56mm	G3/8	150	P2N-BA5B
		3 - 71mm	G1/2	200	P2N-CA5B

DIMENSIONS


ISO 5599-1 Subbase & Manifolds

VDMA Side Ported Subbases

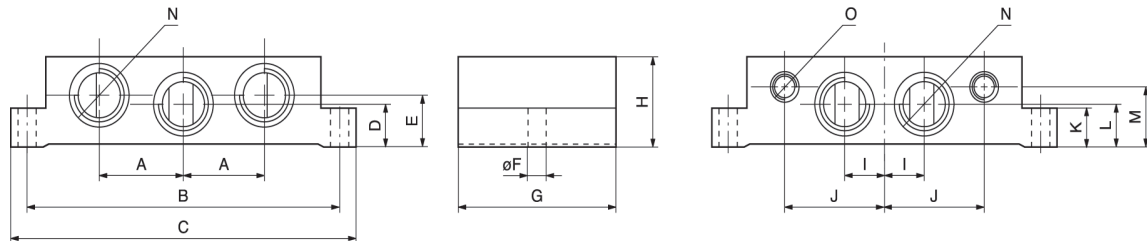


Order code	ISO Size	Port Size	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O
P2N-VS512SD	1	G1/4	21,5	98	110	11	20	5,5	48	32	12	29	10	11	23	G1/4	G1/8
P2N-WS513SD	2	G3/8	28	112	124	14	26	6,6	56	40	15	37	13	14	30	G3/8	G1/8
P2N-YS514SD	3	G1/2	34	136	149	17	17	6,6	71	32	16	45	18	17	22	G1/2	G1/8

VDMA Bottom Ported Manifold

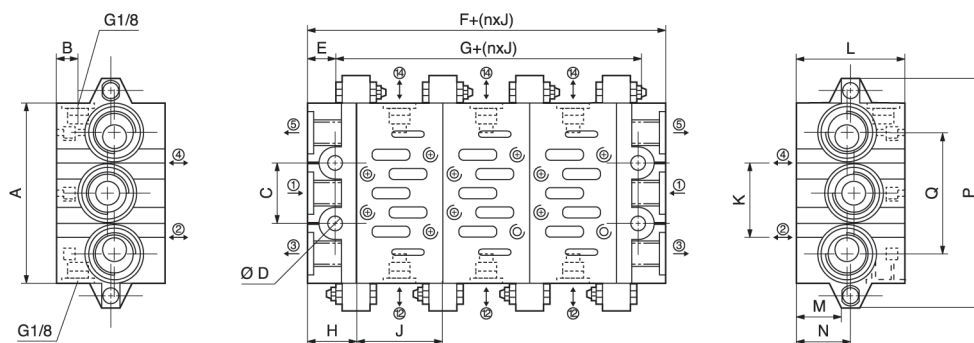

Order code	ISO Size	Port 1, 3, 5	Port 2, 4	A	B	C	D	E	F	G	H	J	K	L	M	N	O	P
P2N-VM512MB	1	G3/8	G1/4	85	8,5	28	7	11	44	22	22	43	26	46	21	24	56	110
P2N-WM513MB	2	G1/2	G3/8	100	9	35	9	13	52	26	26	56	30	47	22	24	68	135
P2N-YM514MB	3	G1	G1/2	140	10	52	12	15	60	30	30	71	38	56	31	34	104	190

Side ported subbases

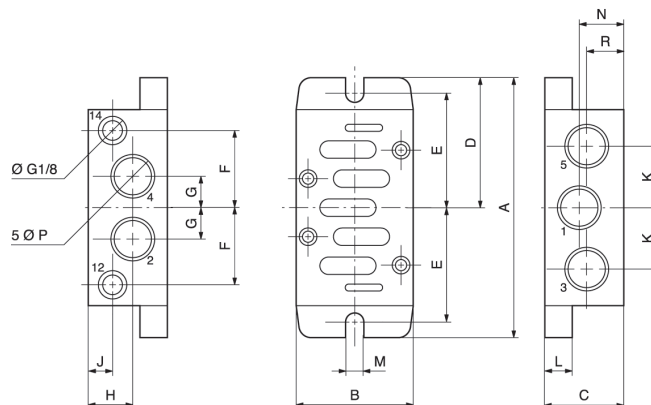

Order code	ISO Size	ϕP	A	B	C	D	E	F	G	H	J	K	L	M	N	R
PL1-1/4-70	1	G1/4	110	46	29	55	49	30	11	17,75	17,75	22	6	5,5	17,75	17,75
PL2-3/8-70	2	G3/8	124	56	37	62	55	37	14,5	22,5	14	28	6	5,5	22,5	14,5
P2N-JS516SD	3	G3/4	149	71	60	74,5	68	45	21	33	10	40	18	6,6	37,5	22,5