



## BSPP Female Adapter For fractional tube





| CPI™<br>PART NO. | A-LOK®<br>PART NO. | INTER-<br>CHANGES<br>WITH | INCHES       |                |      |     |          |      |
|------------------|--------------------|---------------------------|--------------|----------------|------|-----|----------|------|
|                  |                    |                           | TUBE<br>O.D. | BSPP<br>THREAD | A    | K   | W<br>HEX | BORE |
| 4-4R T2HG        | 4FA4R              | 4-TA-7-4RP                | 1/4          | 1/4            | 1.68 | .63 | 3/4      | .18  |
| 6-6R T2HG        | 6FA6R              | 6-TA-7-6RP                | 3/8          | 3/8            | 1.53 | .69 | 7/8      | .28  |
| 8-8R T2HG        | 8FA8R              | 8-TA-7-8RP                | 1/2          | 1/2            | 1.91 | .91 | 1-1/16   | .39  |

**NOTE:** Copper washer must be used for this design.

Dimensions for reference only, subject to change.

Tube stub is pre-grooved as standard. Generic (non-grooved) can be ordered through Quick Response Department.  
Add -Z6 for assembly of nuts and ferrules on the tube stub end.

## BSPP Female Adapter For metric tube





| CPI™<br>PART NO. | A-LOK®<br>PART NO. | INTER-<br>CHANGES<br>WITH | MILLIMETERS  |                |      |      |          |      |
|------------------|--------------------|---------------------------|--------------|----------------|------|------|----------|------|
|                  |                    |                           | TUBE<br>O.D. | BSPP<br>THREAD | A    | K    | W<br>HEX | BORE |
| T2HG 3-1/8R      | M3FA1/8R           | 3-MTA-7-2RP               | 3            | 1/8            | 28,6 | 13,5 | 14,0     | 1,8  |
| T2HG 3-1/4R      | M3FA1/4R           | 3-MTA-7-4RP               | 3            | 1/4            | 28,6 | 13,7 | 19,0     | 1,6  |
| T2HG 4-1/8R      | M4FA1/8R           | 4-MTA-7-2RP               | 4            | 1/8            | 29,4 | 14,3 | 14,0     | 2,0  |
| T2HG 6-1/8R      | M6FA1/8R           | 6-MTA-7-4RP               | 6            | 1/8            | 31,0 | 15,9 | 14,0     | 4,0  |
| T2HG 6-1/4R      | M6FA1/4R           | 6-MTA-7-4RP               | 6            | 1/4            | 37,3 | 15,9 | 19,0     | 4,0  |
| T2HG 8-1/4R      | M8FA1/4R           | 8-MTA-7-4RP               | 8            | 1/4            | 38,1 | 16,7 | 19,0     | 6,4  |
| T2HG 10-1/4R     | M10FA1/4R          | 10-MTA-7-4RP              | 10           | 1/4            | 38,9 | 17,5 | 19,0     | 7,5  |
| T2HG 10-1/2R     | M10FA1/2R          | 10-MTA-7-8RP              | 10           | 1/2            | 43,7 | 17,5 | 27,0     | 7,5  |
| T2HG 12-3/8R     | M12FA3/8R          | 12-MTA-7-6RP              | 12           | 3/8            | 44,5 | 23,0 | 22,0     | 9,1  |
| T2HG 12-1/2R     | M12FA1/2R          | 12-MTA-7-8RP              | 12           | 1/2            | 48,4 | 23,0 | 27,0     | 9,1  |
| T2HG 16-1/2R     | M16FA1/2R          | 16-MTA-7-8RP              | 16           | 1/2            | 50,0 | 24,6 | 27,0     | 12,7 |
| T2HG 18-3/4R     | M18FA3/4R          | 18-MTA-7-12RP             | 18           | 3/4            | 53,2 | 24,6 | 33,0     | 14,0 |
| T2HG 20-3/4R     | M20FA3/4R          | 20-MTA-7-12RP             | 20           | 3/4            | 54,0 | 25,4 | 33,0     | 15,1 |
| T2HG 25-1R       | M25FA1R            | 25-MTA-7-16RP             | 25           | 1              | 67,5 | 31,8 | 41,0     | 19,8 |

**NOTE:** Copper washer must be used for this design.

Dimensions for reference only, subject to change.

Tube stub is pre-grooved as standard. Generic (non-grooved) can be ordered through Quick Response Department.  
Add -Z6 for assembly of nuts and ferrules on the tube stub end.

## Push-Lok to Tube Adapter For fractional tube

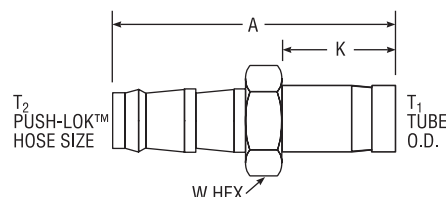

| CPI™<br>PART NO. | A-LOK®<br>PART NO. | INTER-<br>CHANGES<br>WITH | INCHES                      |                             |      |     |          |
|------------------|--------------------|---------------------------|-----------------------------|-----------------------------|------|-----|----------|
|                  |                    |                           | T <sub>1</sub><br>TUBE O.D. | T <sub>2</sub><br>HOSE SIZE | A    | K   | W<br>HEX |
| 4-4 P2T2         | 4P2TU4             | PB4-TA4                   | 1/4                         | -4                          | 1.80 | .64 | 7/16     |
| 6-6 P2T2         | 6P2TU6             | PB6-TA6                   | 3/8                         | -6                          | 2.02 | .72 | 9/16     |
| 8-8 P2T2         | 8P2TU8             | PB8-TA8                   | 1/2                         | -8                          | 2.42 | .98 | 11/16    |

**NOTE:** Drawing does not show Push-Lok collar.

Dimensions for reference only, subject to change.

Tube stub is pre-grooved as standard. Generic (non-grooved) can be ordered through Quick Response Department.  
Add -Z6 for assembly of nuts and ferrules on the tube stub end.

## Color Coding

For easy reference, table column headings are color indicated as follows:

### fractional



### metric

