
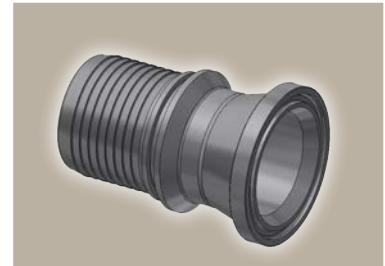


15 ISO 6162-1-Flange Straight

ISO 12151-3-S-L – SFL
(21.0 MPa/ 3000 psi)


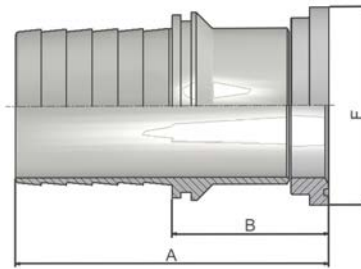


Part Number	Hose I.D.				Flange Inch	A mm	B mm	F mm
	DN	Inch	Size	mm				
K15IF-24-32	50	2"	-32	50,8	1 1/2"	115	59	60,3
K15IF-32-32	50	2"	-32	50,8	2"	117	61	71,4
K15IF-32-40	63	2 1/2"	-40	63,5	2"	119	57	71,4
K15IF-40-40	63	2 1/2"	-40	63,5	2 1/2"	119	57	84,1
K15IF-48-40	63	2 1/2"	-40	63,5	3"	124	62	101,5
K15IF-48-48	76	3"	-48	76,2	3"	167	96	101,5
K15IF-56-56	90	3 1/2"	-56	88,9	3 1/2"	183	91	114,3
K15IF-64-64	100	4"	-64	101,6	4"	206	103	127,0
K15IF-80-80	127	5"	-80	127,0	5"	221	118	152,4
K15IF-80-96	152	6"	-96	152,4	5"	291	151	152,4

To select corresponding half-flange and O-ring see section Eb.

17 ISO 6162-1 Flange 45° Elbow

ISO 12151-3 – E45 – L – SFL 45°
(21.0 MPa/ 3000 psi)

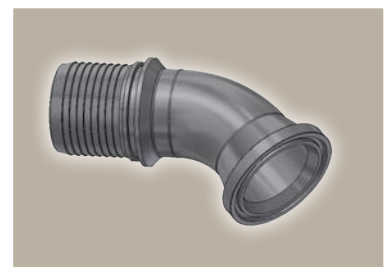

Part Number	Hose I.D.				Flange Inch	A mm	B mm	E mm	F mm
	DN	Inch	Size	mm					
K17IF-40-40	63	2 1/2"	-40	63,5	2 1/2"	163	110	47	84,1
K17IF-48-48	76	3"	-48	76,2	3"	223	152	54	101,5
K17IF-56-56	90	3 1/2"	-56	88,9	3 1/2"	258	166	50	114,3
K17IF-64-64	100	4"	-64	101,6	4"	292	189	57	127,0
K17IF-80-80	127	5"	-80	127,0	5"	341	238	92	152,4
K17IF-80-96	152	6"	-96	152,4	5"	411	271	92	152,4

SAE flange halves see in section Eb.

Fittings with standard O-ring seals can be used for temperatures from -40 °C up to +105 °C.
O-rings see section Eb. Special O-rings are available on request.

Approved **fitting series** for **hose types**, depending on size:

