


19

ISO 6162-1-Flange 90° Elbow

ISO 12151-3 - E- L – SFL 90°
(21.0 MPa/ 3000 psi)

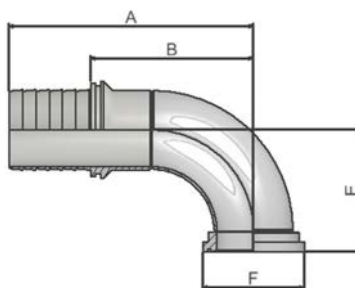

Part Number	Hose I.D.				Flange Inch	A mm	B mm	E mm	F mm
	DN	Inch	Size	mm					
K19IF-20-32-SL95	50	2"	-32	50,8	1 1/4"	118	62	95	50,8
K19IF-24-32-SL120	50	2"	-32	50,8	1 1/2"	137	81	120	60,3
K19IF-32-32-SL100	50	2"	-32	50,8	2"	143	87	100	71,4
K19IF-32-32-SL250	50	2"	-32	50,8	2"	143	87	250	71,4
K19IF-32-40-SL105	63	2 1/2"	-40	63,5	2"	136	74	105	71,4
K19IF-32-40-SL240	63	2 1/2"	-40	63,5	2"	161	99	240	71,4
K19IF-40-32-SL106	50	2"	-32	50,8	2 1/2"	143	87	106	84,1
K19IF-40-32-SL290	50	2"	-32	50,8	2 1/2"	143	87	290	84,1
K19IF-40-40	63	2 1/2"	-40	63,5	2 1/2"	161	108	110	84,1
K19IF-40-40-SL200	63	2 1/2"	-40	63,5	2 1/2"	161	108	200	84,1
K19IF-48-40-SL123	63	2 1/2"	-40	63,5	3"	136	74	123	101,5
K19IF-48-40-SL230	63	2 1/2"	-40	63,5	3"	161	99	230	101,5
K19IF-48-48	76	3"	-48	76,2	3"	225	154	132	101,5
K19IF-56-40	63	2 1/2"	-40	63,5	3 1/2"	161	108	125	114,3
K19IF-56-56	90	3 1/2"	-56	88,9	3 1/2"	275	183	137	114,0
K19IF-80-80	127	5"	-80	127,0	5"	361	258	241	152,4
K19IF-80-96	152	6"	-96	152,4	5"	431	291	241	152,4

SAE flange halves see in section Eb.

Fittings with standard O-ring seals can be used for temperatures from -40 °C up to +105 °C.

O-rings see section Eb. Special O-rings are available on request.

Approved **fitting series** for **hose types**, depending on size:

