
FF42EDMX Extended male stud connector

Triple-Lok® 37° Flare end / Male BSPP thread - ED seal (ISO 1179-2)
SAE 070122

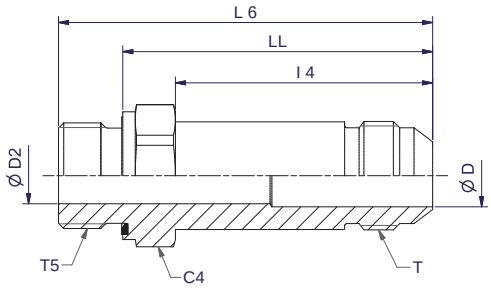

Tube O.D. mm	Tube O.D. inch	Thread UN/UNF-2A T	Thread BSPP T5	C4 mm	D mm	D2 mm	I4 mm	L6 mm	LL mm	Weight (steel) g/1 piece	Triple-Lok® Steel	Triple-Lok® Stainless Steel	PN (bar) S	PN (bar) SS
10	3/8	9/16-18	1/4-19	19	8	6	40	61	49	**60**	**6FF42EDMXS**	**6FF42EDMXSS**	420	350
12	1/2	3/4-16	3/8-19	22	10	9	48	70	58	**100**	**8FF42EDMXS**	**8FF42EDMXSS**	420	350
14, 15, 16	5/8	7/8-14	1/2-14	27	12	12	53	79	65	**170**	**10FF42EDMXS**	**10FF42EDMXSS**	350	350
18, 20	3/4	1 1/16-12	3/4-14	32	16	16	64	93	77	**280**	**12FF42EDMXS**	**12FF42EDMXSS**	350	350

Steel, stainless steel and brass Triple-Lok® parts are delivered with NBR elastomeric seals as standard. For more details on other materials see page K92.

Order codes shown are part of our current manufacturing programme.

Imperial and metric parts may vary in hexagon dimensions.

$\frac{\text{PN (bar)}}{10}$ = PN (MPa)

Do not create drawings from these dimensions, they are subject to change and ISO manufacturing allowances.

K